

Mfg. By :

Shine Mica[®]
Laminate Pvt. Ltd.

SHINEMICA LAMINATE PVT. LTD
Rohishala Village, Nr. L & T Toll Plaza-04,
Halvad ighway, Tal : Maliya-363 630
Morbi, Gujarat, INDIA.

Cell : +91 90335 72928
Office : +91 63517 97178
E-mail : info@shinemica.com
Web : www.shinemica.com



HARSHODH GRAPHICS 8856000407



*Creating Brands to
Touch Hearts and
Make Them Stand Out.*





About us...

Our company was established in 2015 to carry out a special mission to provide access to the finest quality of laminate sheet all across the globe. Together as a team, we have the vision to prosper in our covet domain. To date, our company is one of the progressive and dynamic organizations in the laminate industry sector of India.

Shinemica Laminate Pvt. Ltd. is one of the preeminent high pressure decorative laminate manufacturers located at Morbi, Gujarat; since 2015. At Shinemica, we strive for authentication over replication. Manufacturing the best quality has been our prime concern since our existence. With a large-scale factory area and a team of cooperative professionals, Shinemica has its own competitive superiority to endure in the contemporary domain of declarative laminate sheet. It all started with a dream to supersede in the domain of decorative laminate sheet with par excellence.

Shinemica furnishes a wide range of Decorative laminate sheet series in a variety of luxurious paper designs with attractive structure, all products are manufactured to meet international standards. Altogether, this makes Shinemica a growth devoted organization where we strive for progress beyond perfection.

E-mail : info@shinemica.com
Web : www.shinemica.com



Rich Collection

		QUARTZ STONE	QS	PAGE 01
PAGE 03	WO	WOODY OAK		
		JUNGLE OAK	JO	PAGE 05
PAGE 07	SW	SILK WOOD		
		VENZA	VZ	PAGE 09
PAGE 11	LC	LUMBER CUT		
		CHIFFON FINISH	CF	PAGE 13
PAGE 15	VNR	VENEER		
		GLAMOUR TOUCH	GT	PAGE 19
PAGE 21	WD	WOODY		
		RIGATO FINISH	RF	PAGE 23
PAGE 25	OAK	OAK		
		SUPER MATT	SM	PAGE 29
PAGE 33	HG	HIGH GLOSS		
		SUEDE FINISH	SF	PAGE 37
PAGE 47	HG	HG SOLID COLOR		



HOME



OFFICE




HOTEL



MALL



HOSPITAL

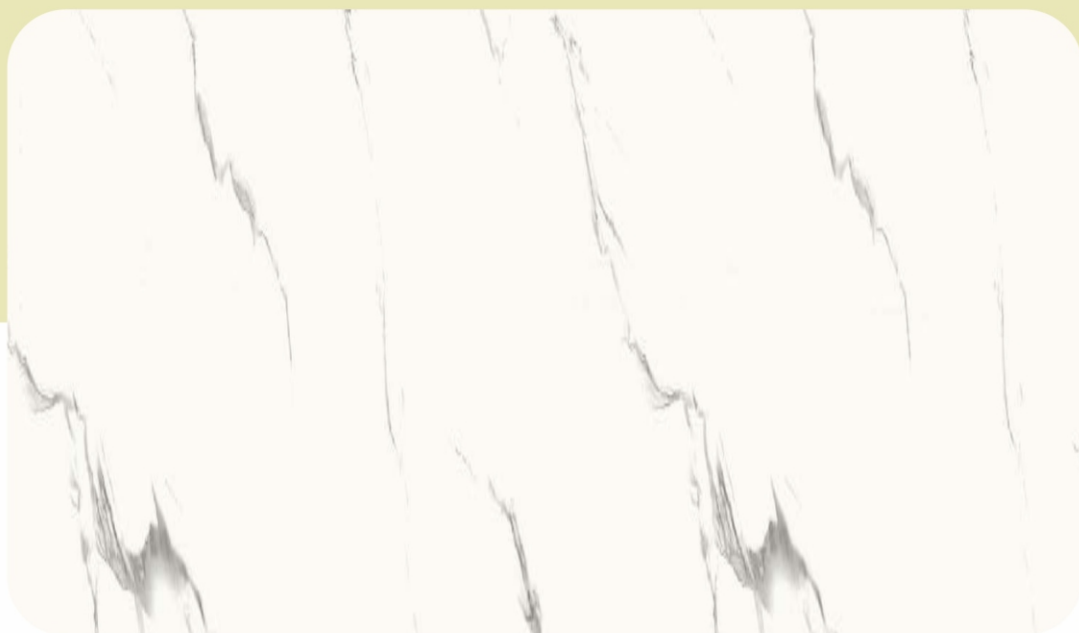

346 | QS



348 | QS



348 | SM



347 | SM



347 | QS



333 | WO




334 | WO



329 | WO

Crafted Collection

Grasp the brilliant magnificence of our laminates drive accompanying extraordinary vibes.



202 | SM



329 | WO



333 | WO



334 | WO



329 | WO

333 | WO 211 | HG

Crafted Collection

Grasp the brilliant magnificence of our laminates drive accompanying extraordinary vibes.

Modern Collection



committed towards
quality and a class
for the inner or
face decor of every
furniture elements




JUNGLE OAK

Listening glances

Never seen before, these laminates
will improve your space in
sophistication and elegance.




216 | SM



337 | JO




335 | JO

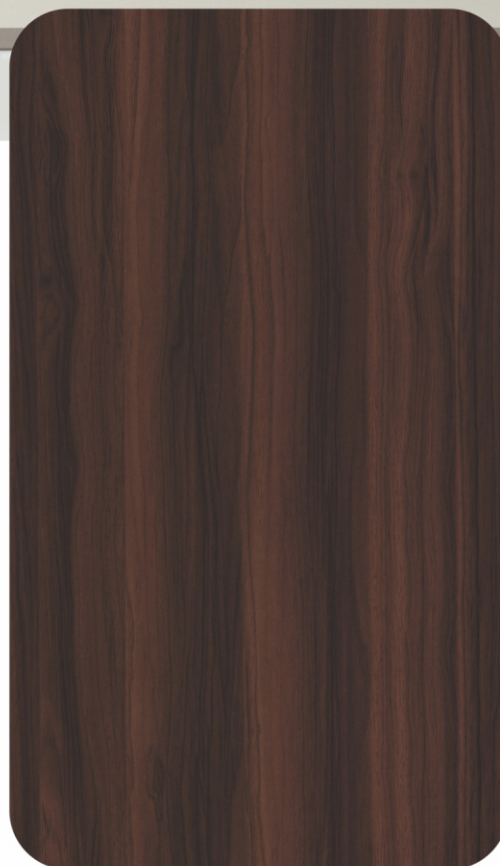

336 | JO



337 | JO

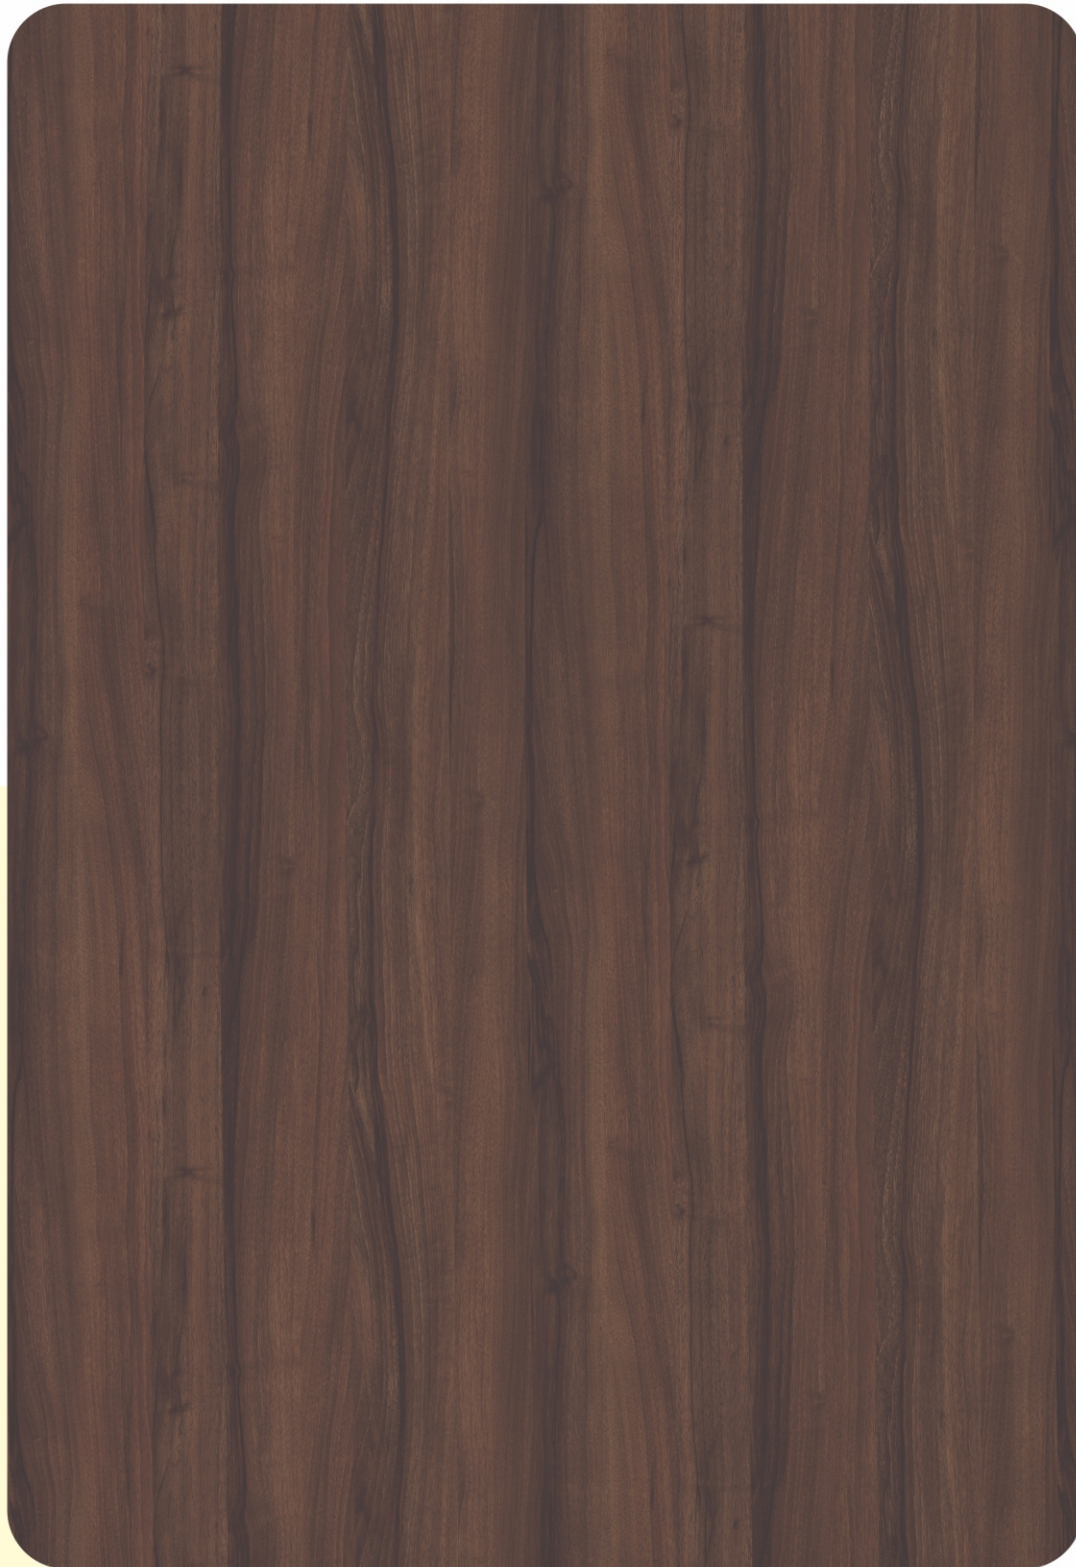

338 | SW




306 | SW




304 | SW




Leoric Lights

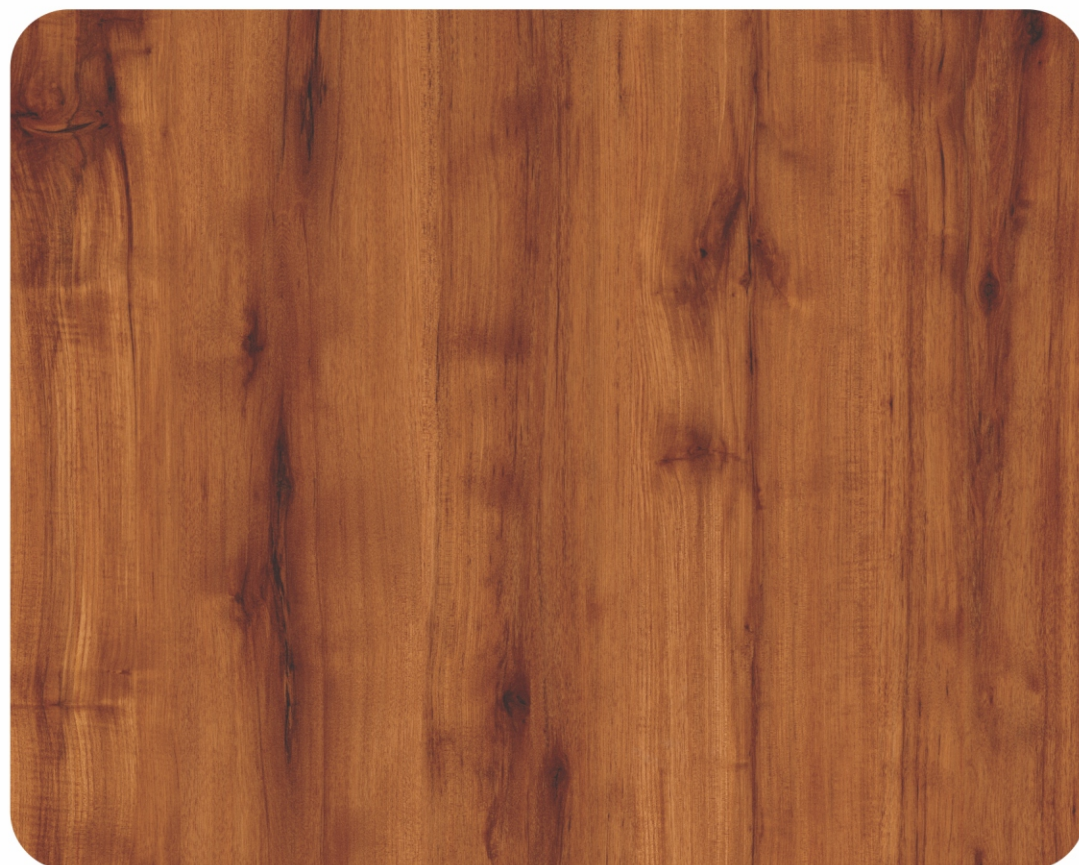

332 | VZ

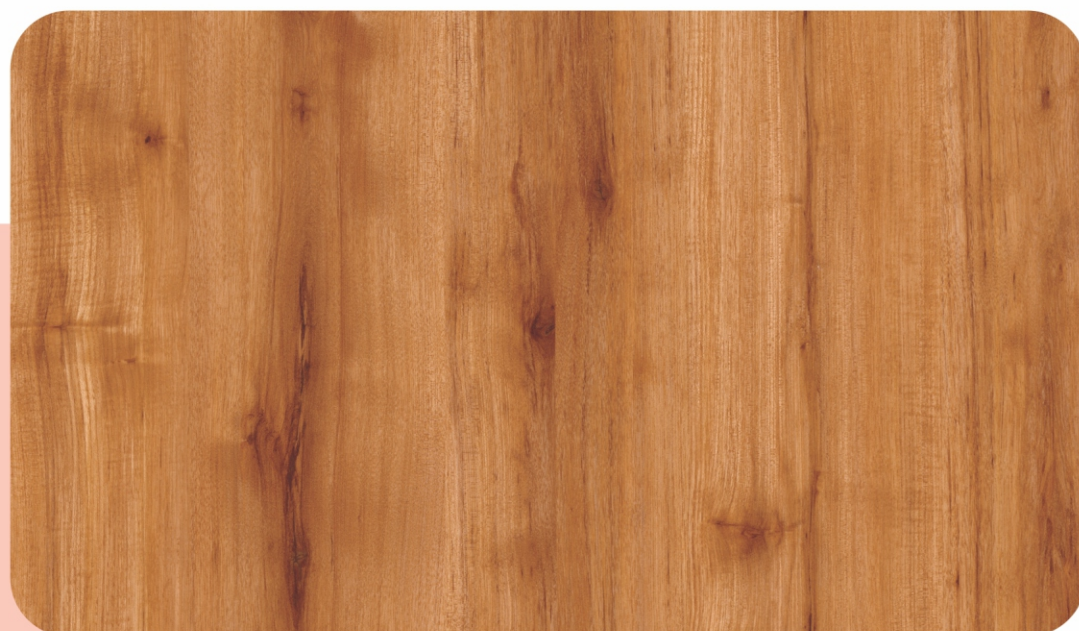

331 | VZ

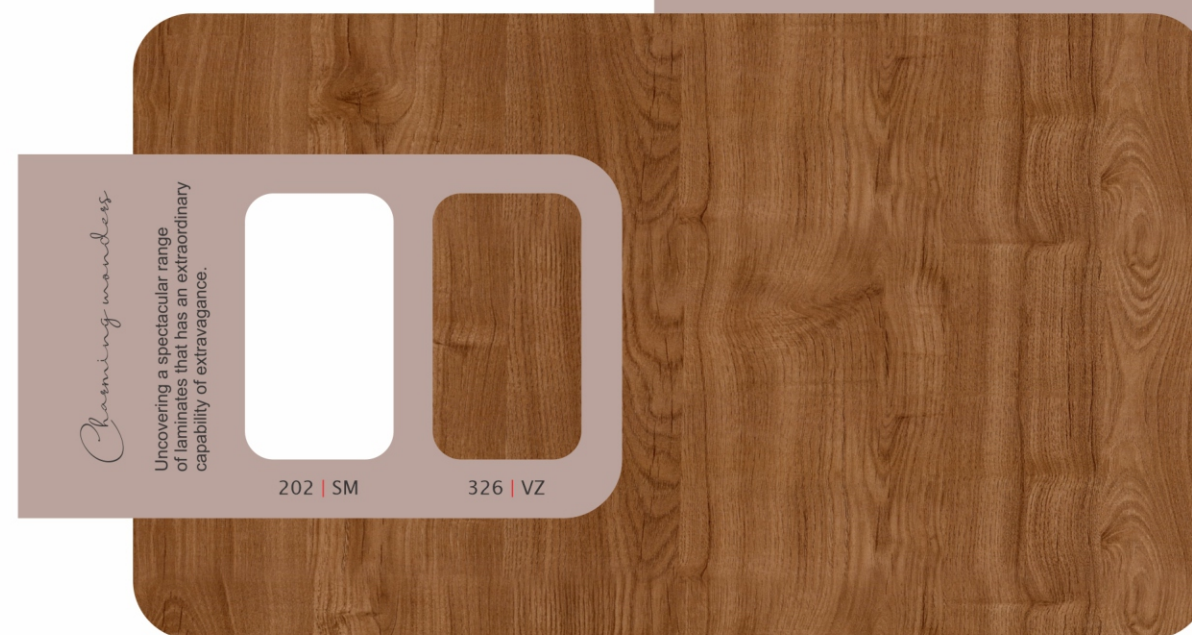

326 | VZ



304 | VZ



323 | VZ




332 | VZ

202 | HG


Charming wonders

Uncovering a spectacular range of laminates that has an extraordinary capability of extravagance.

332 | VZ

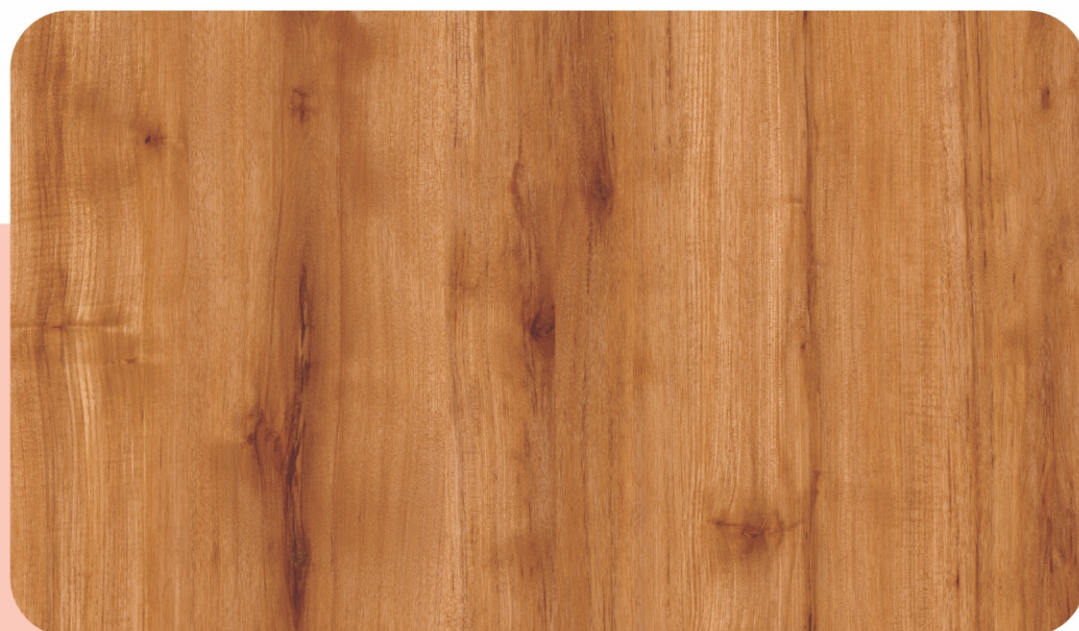

331 | VZ

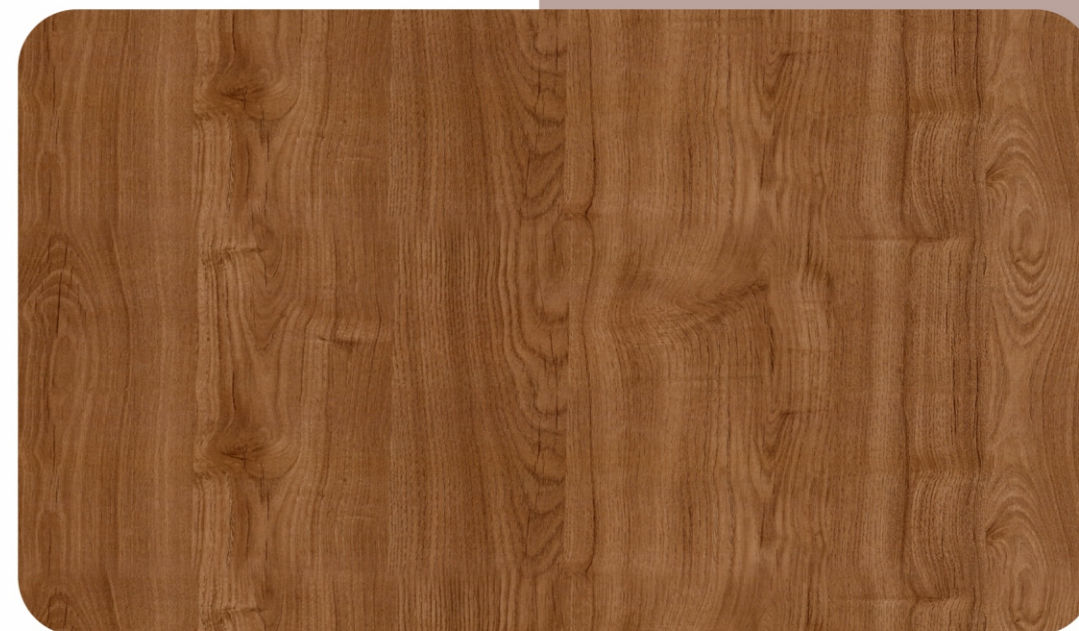

326 | VZ



304 | VZ



323 | VZ



339 | LC



338 | LC



340 | LC



341 | LC

Made mesmerizing

These coffee style laminates puts a transmitting smile over your face and accelerates the mood.



201 | SM



341 | LC

Architecture

Beauty meets grace






342 | CF




326 | CF

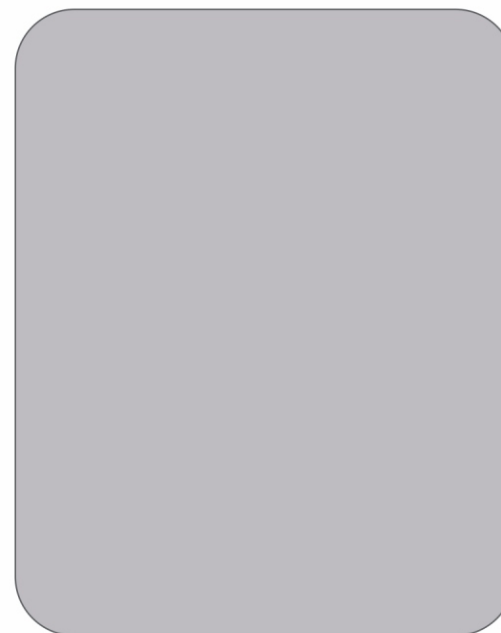


206 | CF



211 | CF

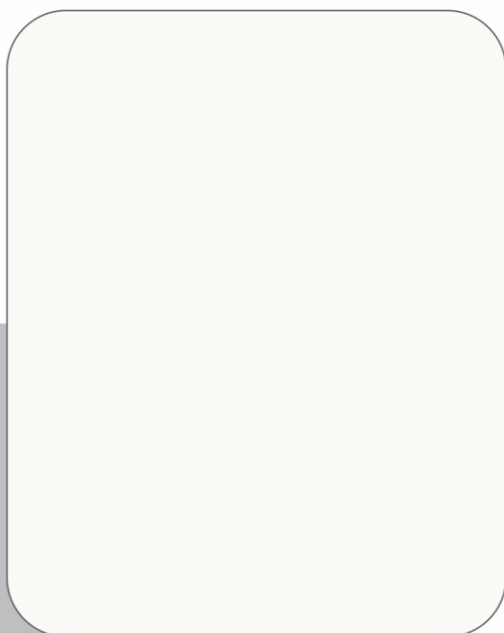

202 | CF

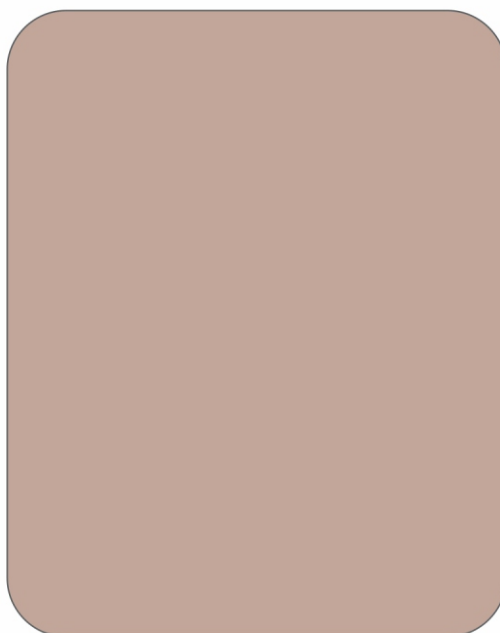

216 | CF



332 | CF



331 | CF



330 | VNR




349 | VNR



350 | HG



349 | HG

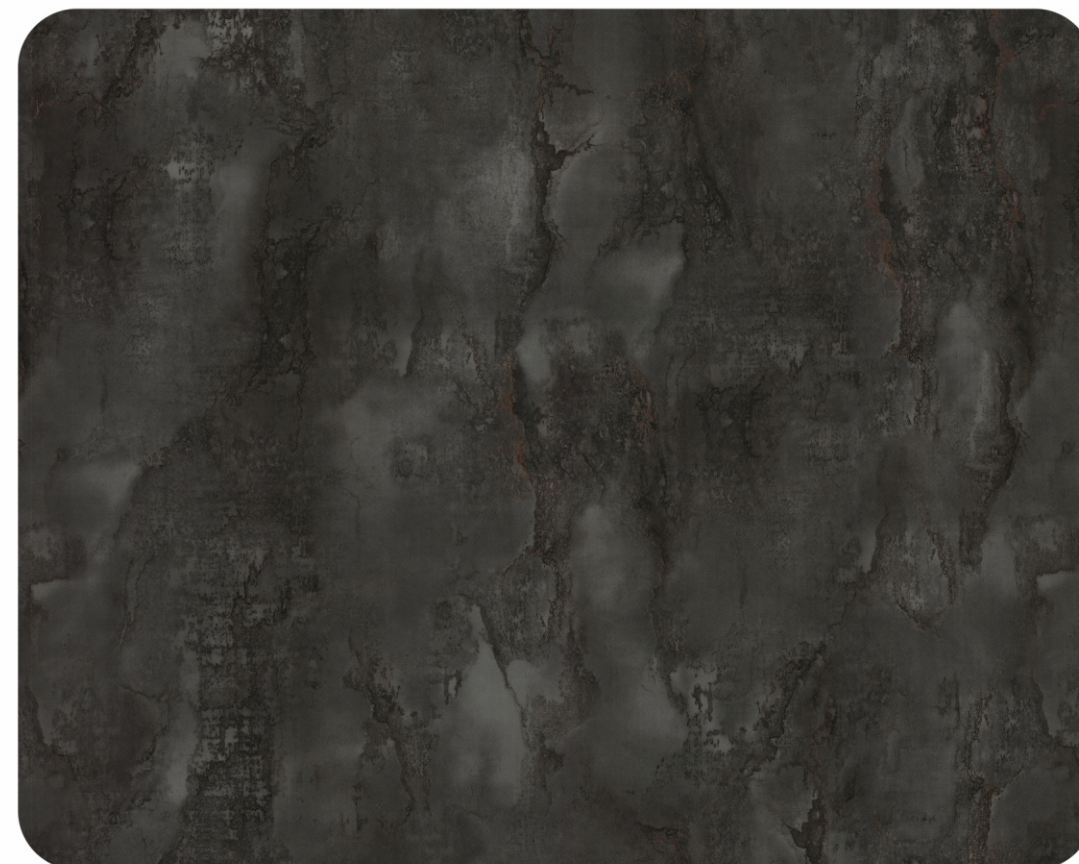

350 | VNR

veneer



333 | VNR



334 | VNR




342 | VNR




328 | VNR



327 | VNR

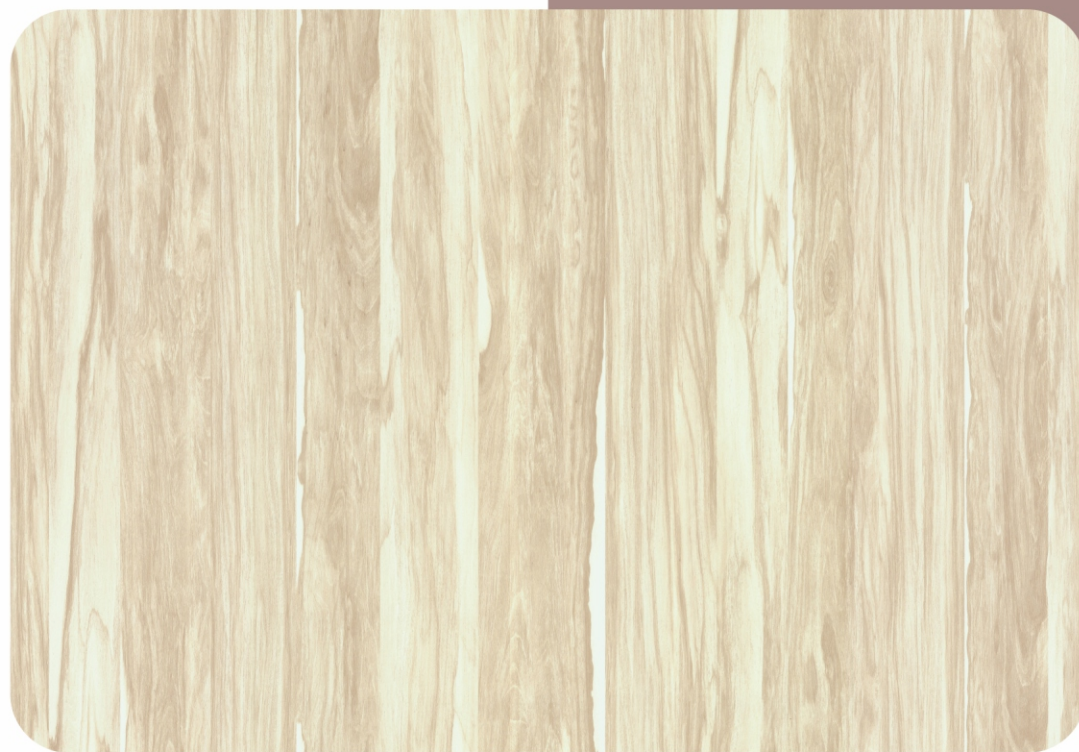

344 | GT

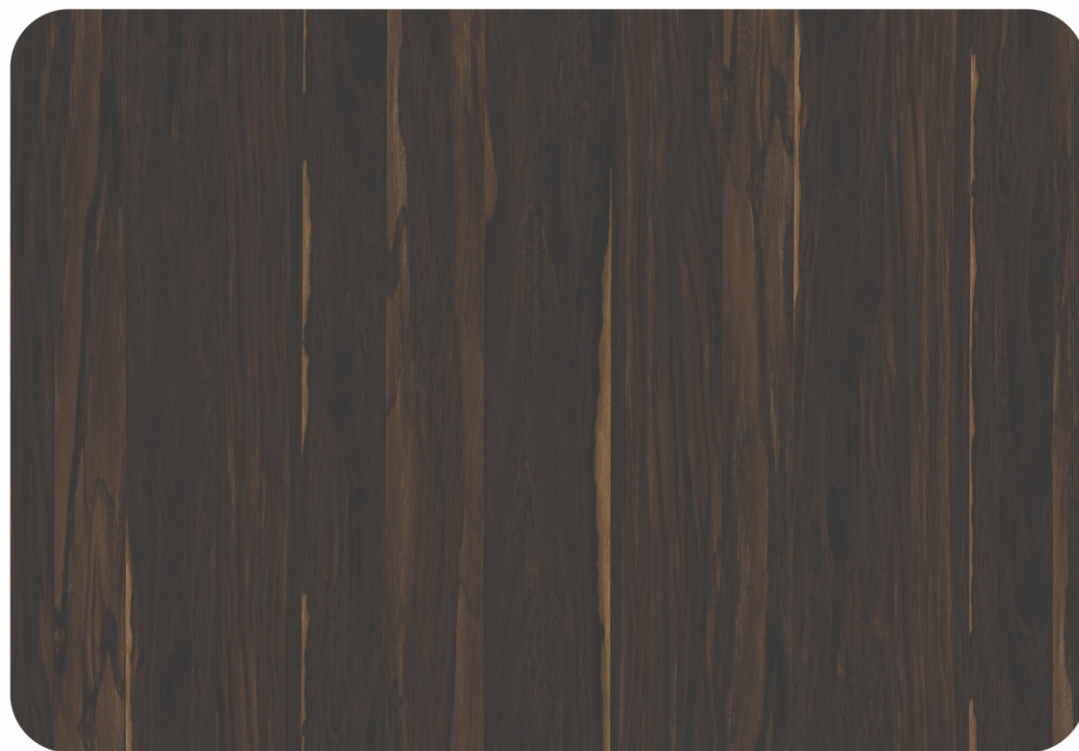

345 | GT

Choose
the mode of
LUXURIOUSNESS



337 | GT

GLAMOUR TOUCH



343 | GT





332 | WD



313 | WD



322 | WD




315 | WD



331 | WD

Oak Wooden



great designs are always made with great products and Silk lam is the perfect for it.

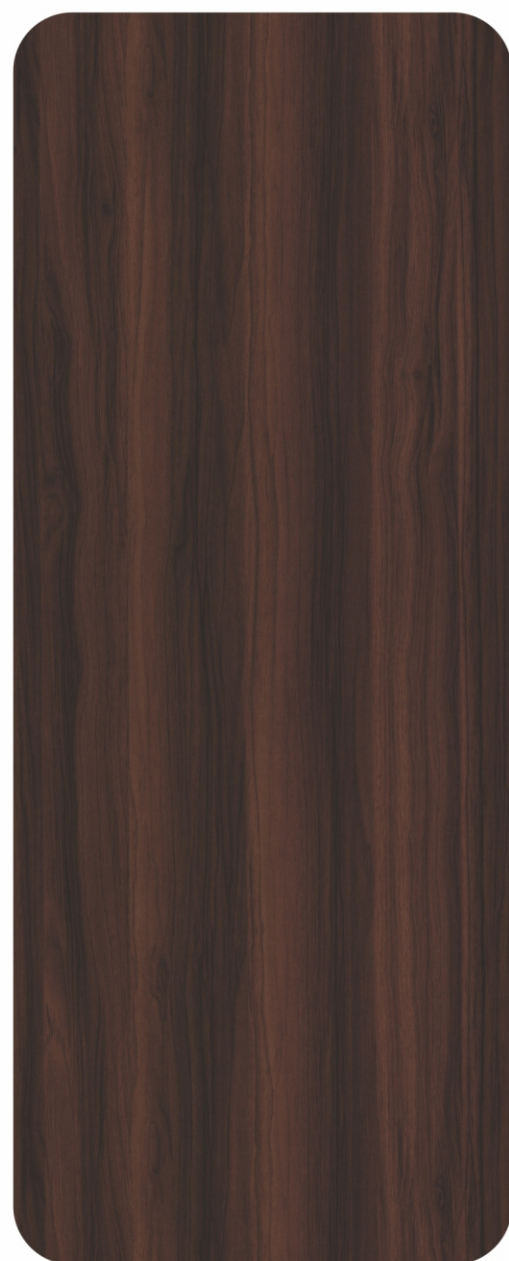


336 | RF



335 | RF

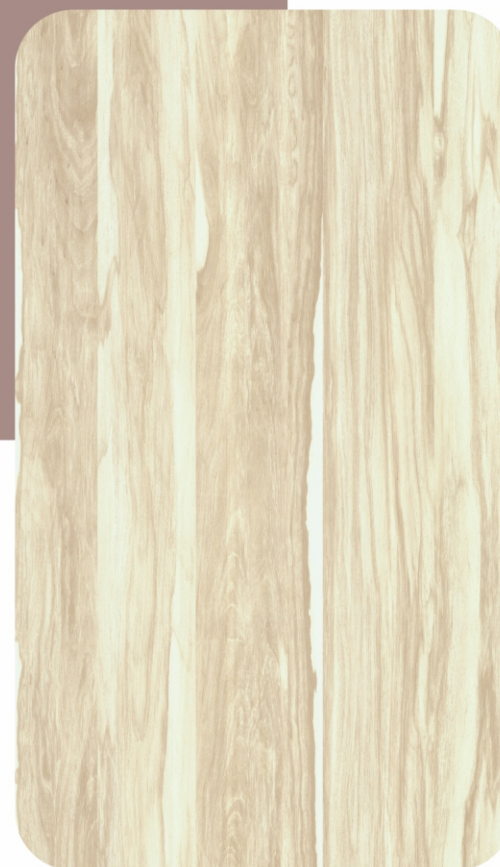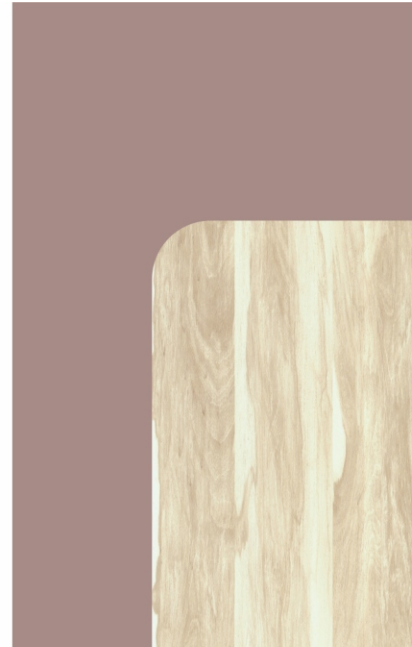

344 | RF

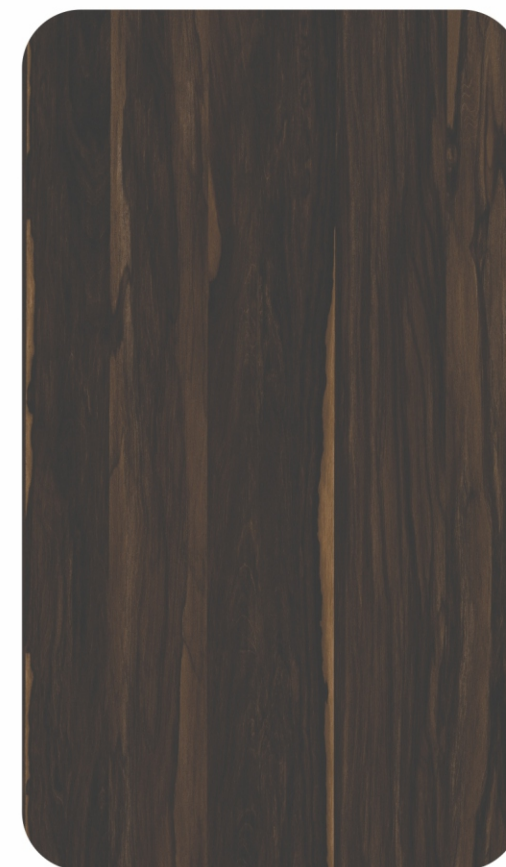

345 | RF



211 | CF

330 | WD



330 | RF


RIGATO FINISH



341 | OAK



340 | OAK

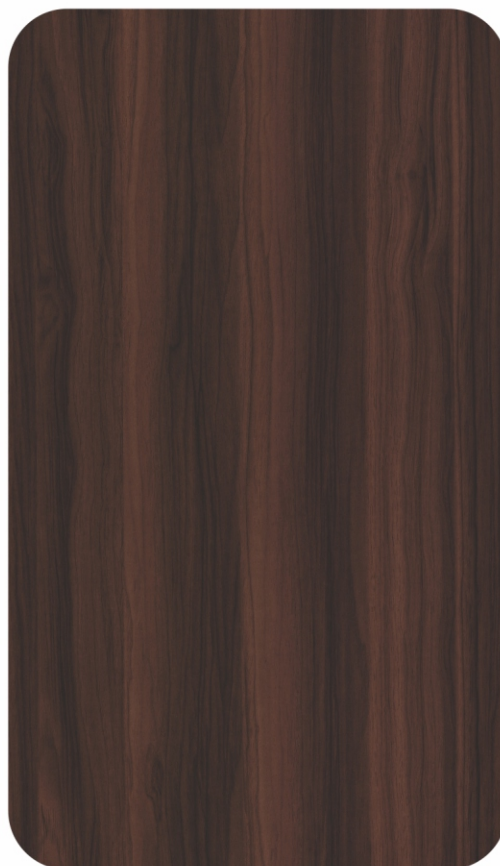

336 | OAK



fascinating creations

Laminates that are made to illuminate your space and stay in your minds for eternity



211 | SM



333 | OAK

333 | OAK



334 | OAK




341 | OAK



333 | OAK



340 | OAK

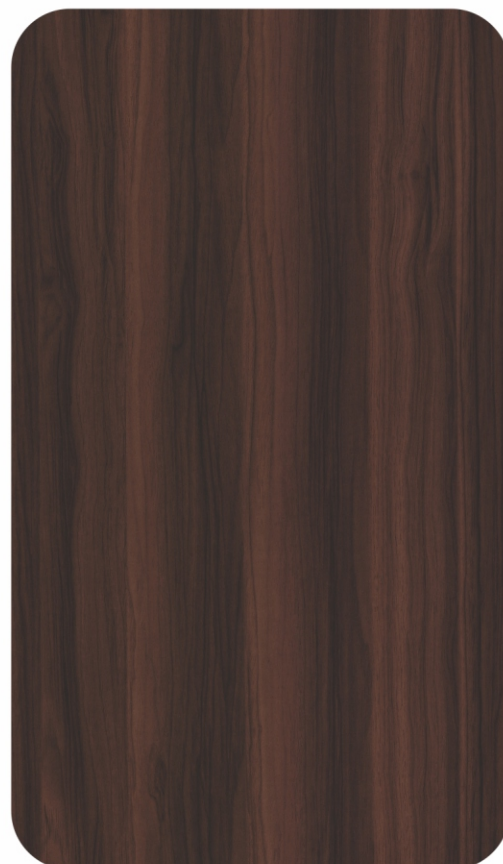

336 | OAK



334 | OAK


evergreen wooden
caboodle for the
people who loves
the real teak shades.

Prima Brown & Honey



100% Phenolic & Melamine Resin
Borer & Termite Free
ISO Certified
Even Sanding By Double Head Tech.


OAK

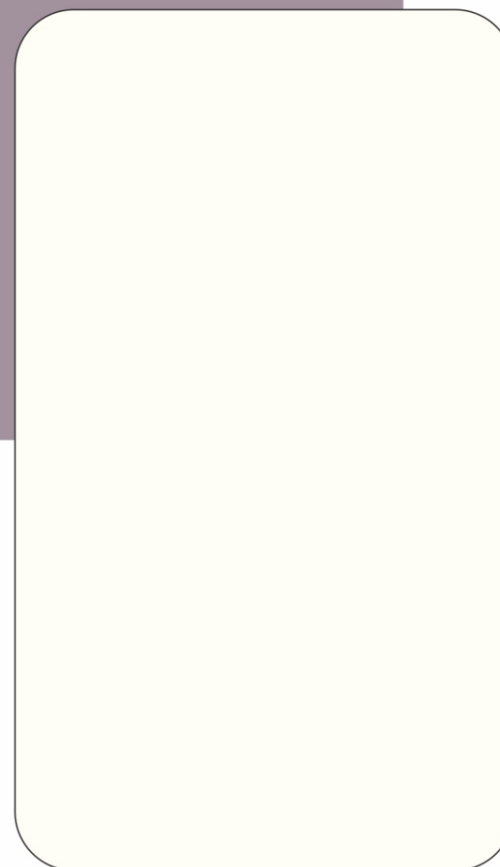

202 | OAK




338 | OAK

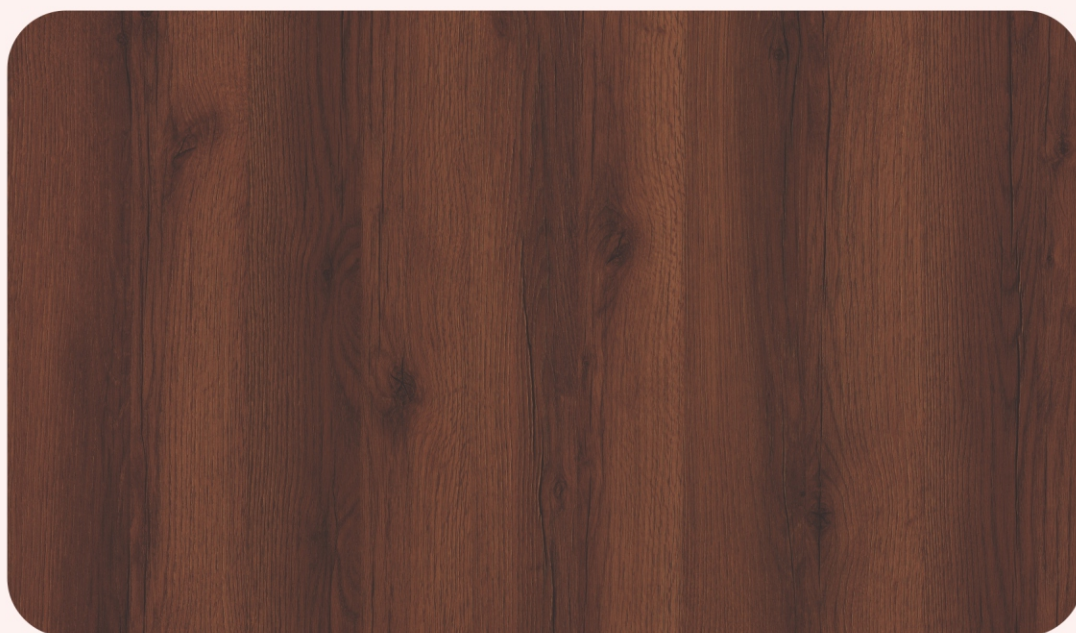

337 | OAK



339 | OAK

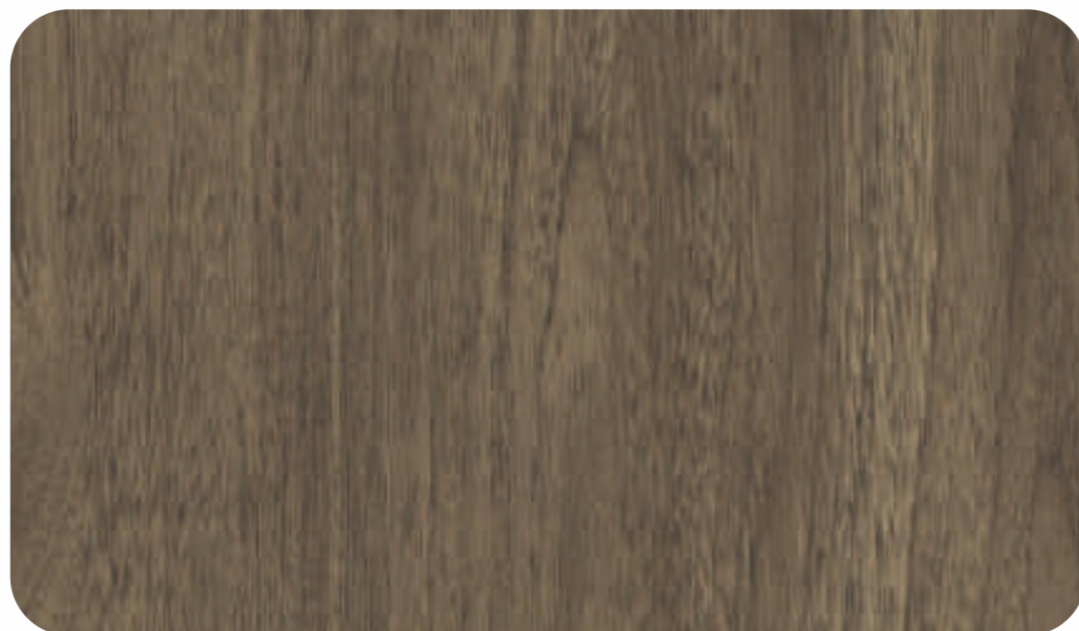

328 | SM



350 | SM



349 | SM



341 | SM



340 | SM



Virola Wood

Embrace a classy lifestyle that stems from your use of exotic laminates in your ambience.

exotic laminates



324 | SM



323 | SM



346 | SM



339 | SM



342 | SM




Bannoy Wood
LAMINATE


Collection




315 | HG

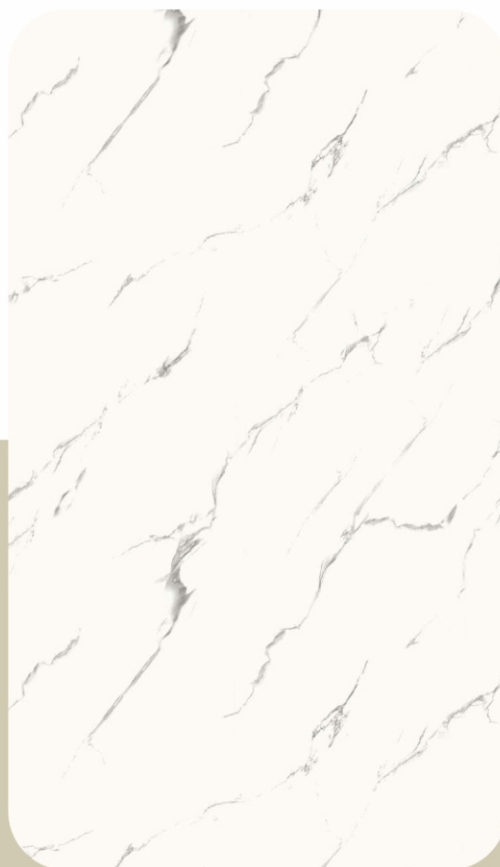

346 | HG

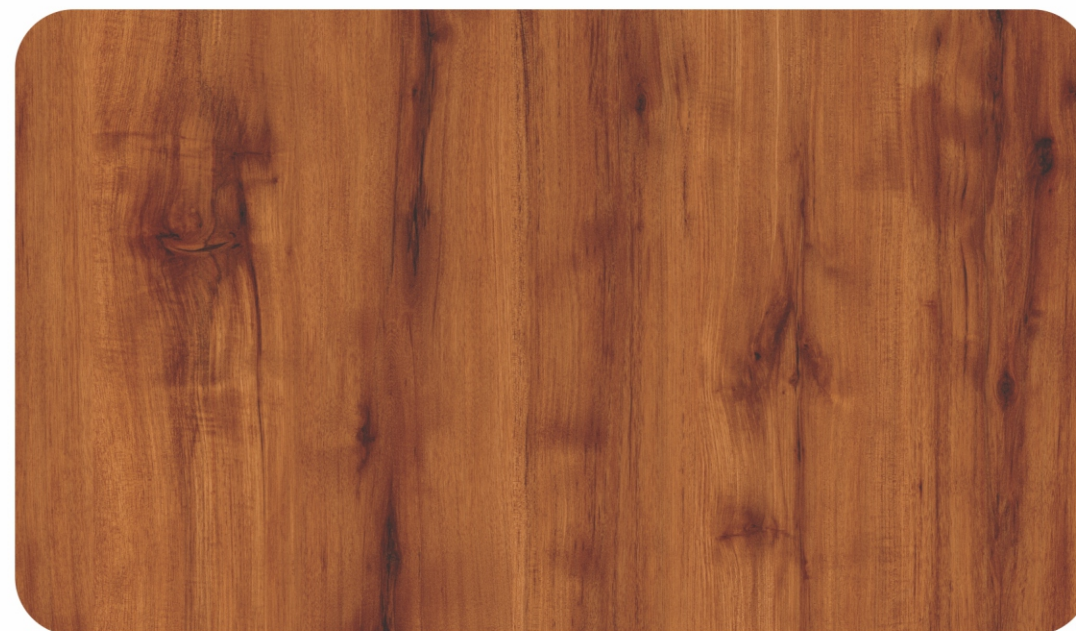

332 | HG

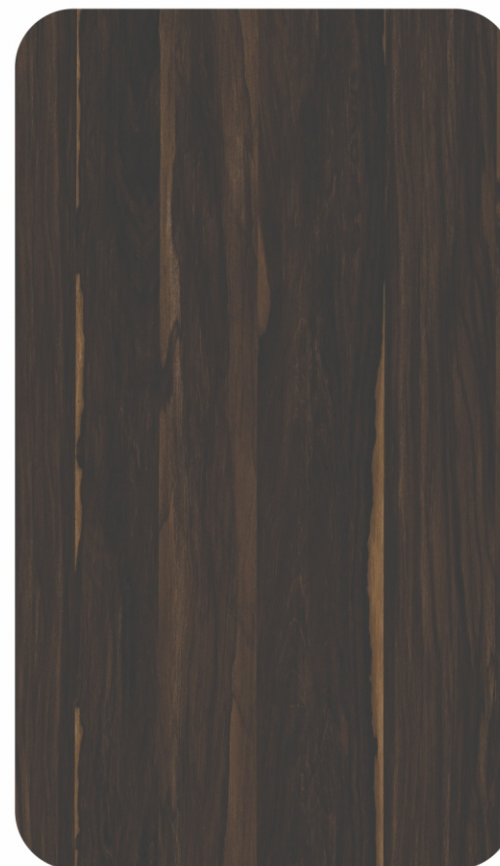

345 | HG



344 | HG



330 | HG



348 | HG



347 | HG



Paline Gon



323 | HG



343 | HG

SUEDE FINISH




333 | SF



334 | SF



325 | SF

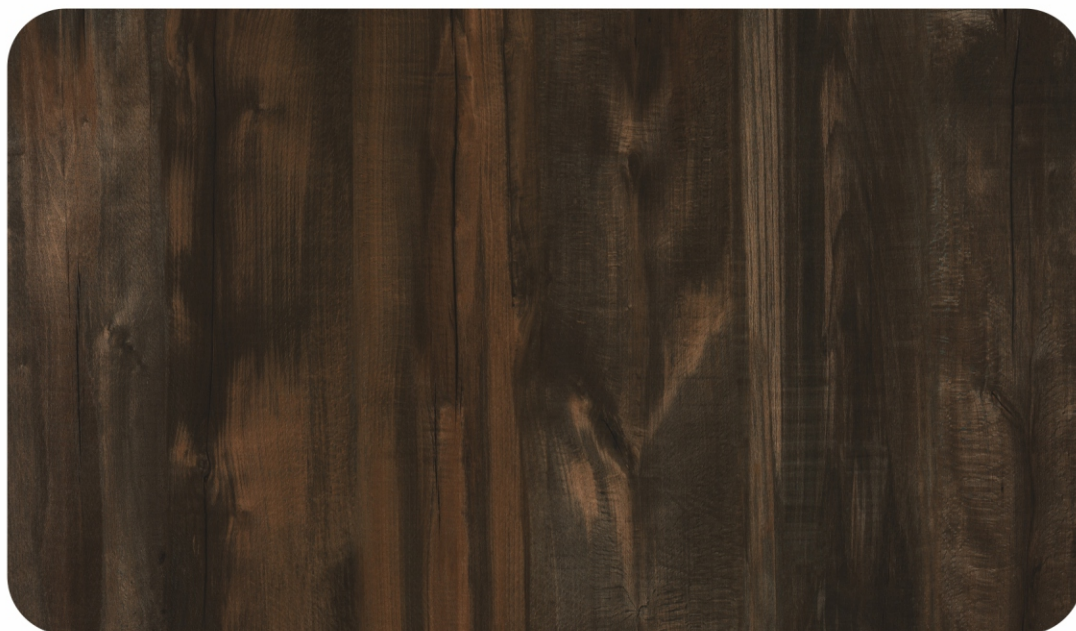

342 | SF



326 | SF


SUEDE FINISH

*Admiring
Versatility*


Relish in the company of Silk Lam and its range of exotically enamoring surfaces.



339 | SF

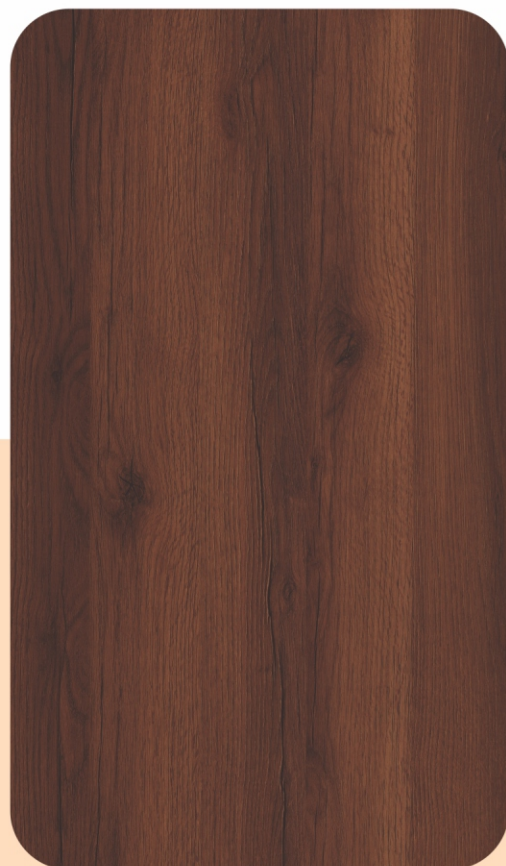


337 | SF

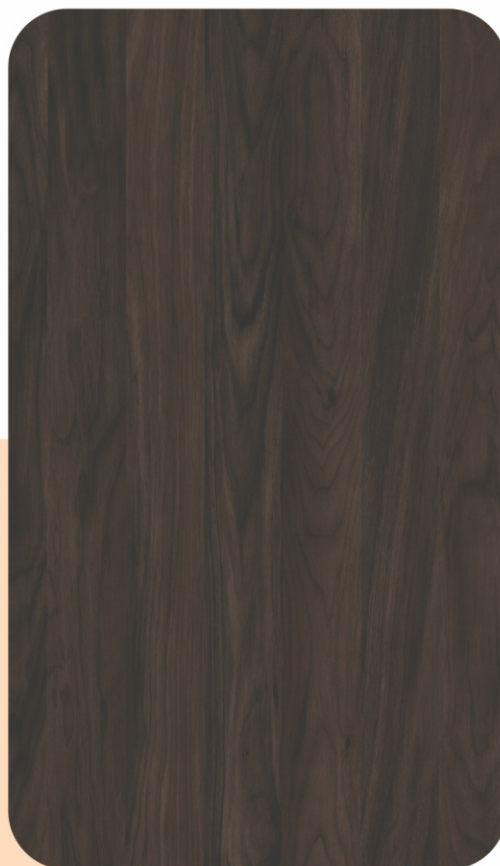

343 | SF



331 | SF

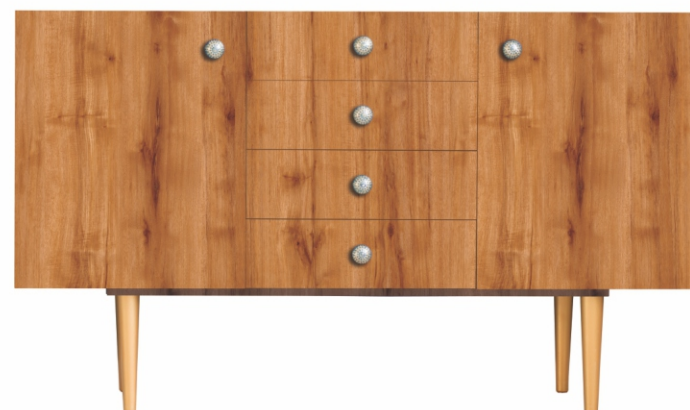

332 | SF



320 | SF




304 | SF



329 | SF



306 | SF

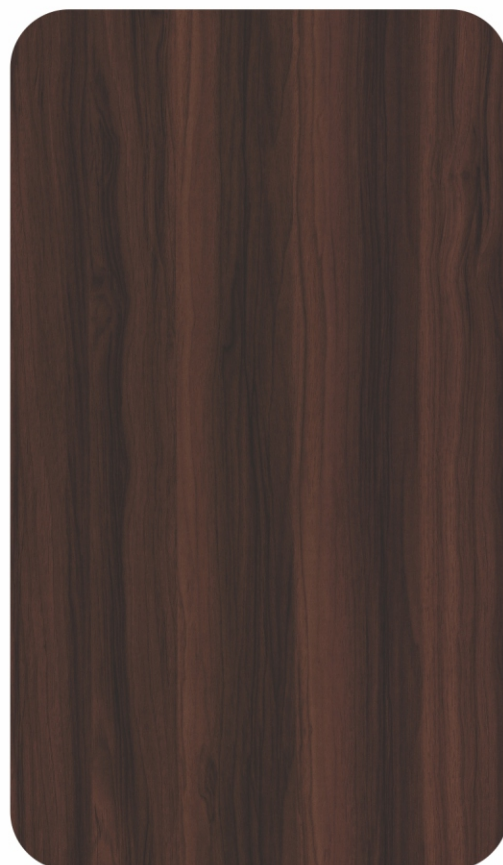

336 | SF



335 | SF




338 | SF

SUEDE FINISH



344 | SF

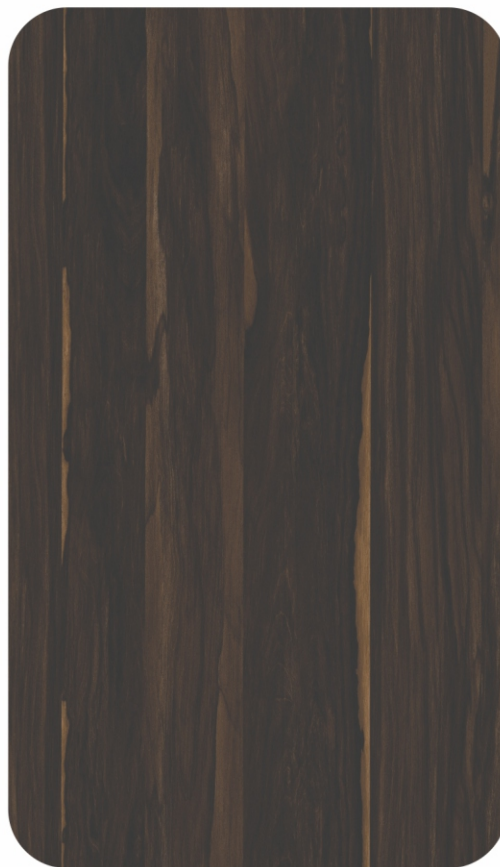

345 | SF



330 | SF

100% Phenolic
& Melamine Resin
Boiler & Tensile
Test
ISO
Certified
Even Sanding By
Double Head Tech



341 | SF



340 | SF



SUEDE FINISH



319 | SF



322 | SF



323 | SF



324 | SF



313 | SF



315 | SF




328 | SF




327 | SF

Plain Colors

keeping you standout with
a silent shining, the reflective
base revitalize richness of solid
colors palettes.



201 | HG



202 | HG



203 | HG



216 | HG



214 | HG



215 | HG



210 | HG



209 | HG



206 | HG



211 | HG



205 | HG



219 | HG



218 | HG

HG SOLID COLOR



SAMPLE INDEX

Sr. No.	Finish.	Design.	Pg. No.
QUARTZ STONE			
01	QS	346	01
02	QS	347	02
03	QS	348	02
WOODY OAK			
04	WO	333	03
05	WO	329	04
06	WO	334	04
JUNGLE OAK			
07	JO	335	05
08	JO	336	05
09	JO	337	06
SILK WOOD			
10	SW	338	07
11	SW	304	08
12	SW	306	08
VENZA			
13	VZ	331	09
14	VZ	332	09
15	VZ	304	10
16	VZ	323	10
17	VZ	326	10
LUMBER CUT			
18	LC	338	11
19	LC	339	11
20	LC	340	12
21	LC	341	12
CHIFFON FINISH			
22	CF	202	13
23	CF	216	13
24	CF	326	13
25	CF	342	13
26	CF	206	14
27	CF	211	14
28	CF	331	14
29	CF	332	14

Sr. No.	Finish.	Design.	Pg. No.
VENEER			
30	VNR	330	15
31	VNR	349	16
32	VNR	350	16
33	VNR	333	17
34	VNR	334	17
35	VNR	342	17
36	VNR	327	18
37	VNR	328	18
GLAMOUR TOUCH			
38	GT	344	19
39	GT	345	19
40	GT	337	20
41	GT	343	20
WOODY			
42	WD	331	21
43	WD	332	21
44	WD	313	22
45	WD	315	22
46	WD	322	22
RIGATO FINISH			
47	RF	335	23
48	RF	336	23
49	RF	330	24
50	RF	344	24
51	RF	345	24
OAK			
52	OAK	336	25
53	OAK	340	25
54	OAK	341	25
55	OAK	333	26
56	OAK	334	26
57	OAK	337	27
58	OAK	202	28
59	OAK	338	28
60	OAK	339	28

Sr. No.	Finish.	Design.	Pg. No.
SUPER MATT			
61	SM	347	01
62	SM	348	01
63	SM	328	29
64	SM	349	29
65	SM	350	29
66	SM	340	30
67	SM	341	30
68	SM	323	31
69	SM	324	31
70	SM	346	31
71	SM	339	32
72	SM	342	32
HIGH GLOSS			
73	HG	349	15
74	HG	350	15
75	HG	315	33
76	HG	330	33
77	HG	346	33
78	HG	332	34
79	HG	344	34
80	HG	345	34
81	HG	348	35
82	HG	323	36
83	HG	343	36
84	HG	347	36
SUEDE FINISH			
85	SF	333	37
86	SF	334	37
87	SF	342	37
88	SF	325	38
89	SF	326	38
90	SF	337	39
91	SF	339	39
92	SF	343	39
93	SF	331	40

Sr. No.	Finish.	Design.	Pg. No.
94	SF	332	40
95	SF	335	41
96	SF	336	41
97	SF	338	41
98	SF	304	42
99	SF	306	42
100	SF	320	42
101	SF	329	42
102	SF	330	43
103	SF	344	43
104	SF	345	43
105	SF	340	44
106	SF	341	44
107	SF	313	45
108	SF	315	45
109	SF	319	45
110	SF	322	45
111	SF	323	46
112	SF	324	46
113	SF	327	46
114	SF	328	46
HIGH GLOSS COLOR			
115	HG	201	47
116	HG	202	47
117	HG	203	47
118	HG	205	47
119	HG	206	47
120	HG	209	47
121	HG	210	47
122	HG	211	47
123	HG	214	47
124	HG	215	47
125	HG	216	47
126	HG	218	47
127	HG	219	47

TECHNICAL SPECIFICATION

Sr. No.	Properties	Unit	Requirement as per IS 2046:1995 Type 5, VG5	Shine Mica Confirm
1	Thickness	mm	0.9 mm (±10%)	✓
2	Resistance to surface wear	Revolutions (Min.)	350 (Min.)	✓
3	Resistance to immersion in boiling water			✓
	• Mass increase	% (Max.)	10.0	✓
	• Thickness increase	% (Max.)	11.8	✓
	• Appearance	Grade (Min.)	4	✓
4	Resistance to dry heat at 180° C	Grade (Min.)	4	✓
5	Dimension stability at elevated temperature			✓
	• Longitudinal	% (Max.)	0.55	✓
	• Transverse	% (Max.)	1.025	✓
6	Dimension stability at 20°C			✓
	• Longitudinal	% (Max.)	0.375	✓
	• Transverse	% (Max.)	0.6	✓
7	Resistance to impact by small diameter ball	'N' (Min.)	20	✓
8	Resistance to Cracking	Grade (Min.)	4	✓
9	Resistance to Scratching	'N' (Min.)	2	✓
10	Resistance to Staining	Reagent 1+2 (Min.) Reagent 3+4 (Min.)	5 4	✓ ✓
11	Resistance to colour change			✓
	• In xenon arc light	Wool standard (Min.)	6	✓
	• In enclosed carbon arc light	Wool standard (Min.)	5	✓
12	Resistance to cigarette burns	Grade (Min.)	3	✓
13	Resistance to steam	Grade (Min.)	4	✓
14	Appearance		Free From foreign particles	✓

Limited Warranty

Limited Warranty Shine Mica warrants that, under normal use, the material and workmanship of its products shall conform to the standards set forth on the applicable technical datasheet for a period of twelve (12) months from the date of sale to first consumer purchaser. Dealers and distributors are provided with the technical data sheet, which contain specific standards of performance for the product. In the event that the product does not perform as warranted, the purchaser's sole remedy shall be limited to repair or replacement of all or any part of the product, which is defective, at the manufacturer's sole discretion. This warranty is not transferable, and expires upon resale or transfer by the first consumer purchaser. This warranty shall not apply to defects or damage arising from any of the following: accidents, abuse or misuse, exposure to extreme temperature, improper fabrication or installation & improper maintenance.

Product Information

Product Type : High Pressure (HPL) Laminates Sheet
Size Info. : 96" x 48" (8 ft x 4 ft)
Thickness : 0.9 mm (±10% Allowed)
Surface Finish : High Glossy, Suede Finish, Matt, and Embossed Surface (Texture)
Quality Standard : Printed on best design papers merged with craft paper, soaked in to purest chemicals and raw material for better flexibility & durability
Care and maintenance : Cleaning would be carried out with a soft moist cloth and warm solution. Do not use detergents containing abrasive particles or excess soda.

Laying Instructions


- Before use ensure that the surface or plywood and laminates are clean, dry, levelled and free of oil, excess moisture or other contaminants, such as dust, synthetic particles, etc.
- Only use white PVA Adhesive to stick the sheet. Apply Double Layer of Adhesive on Edge (Minimum 3-4 inch) on both the surfaces.
- The adhesive should always be stirred before use. Sufficient adhesive should be applied on both of the surface to be bonded. Don't add water into the adhesive, it makes the bonding weak.
- Once applied, adhesive is tricky in nature (usually requires 5-10 minutes, depending on atmospheric conditions), the laminate should be placed on the surface, accurately aligned.
- Sufficient bonding procedure to ensure intimate contact necessary for an adequate bond should be applied over the entire area using as much as procedure as possible without damaging the assembly. Pinch rollers (Rotary Press) and heavy weighted rollers are ideal. Hand rolling should be done from the centre to the edges to ensure the removal of air bubbles. The edges should be rolled twice.
- For satisfactory bonding, the area in question should be kept under pressure for a period of 12-18 hours (Depending on the atmospheric conditions).
- In rainy season or when humidity is too high, moisture may condense on the surface during drying (known as "Blushing") and will prevent an acceptable bond. Hot Spray or Forced air drying may be used to help prevent this condition.
- It is recommended that the maximum sheet size used for vertical field application be limited to 610x2440 mm (2x8 Ft.).
- When laminate is pasted vertically maintain uniform pressure on all sides till adhesive is dried.
- To avoid stress cracking, avoid making cut out having sharp corners and rough edges.
- A gap of minimum 2 mm should be maintained between two laminates while pasting side by side.
- Due to transportation limitations, lay the laminate sheet on flat surface in between 2 plywood sheets for minimum 48 Hrs



no warranties on corner crack
(use drill while cutting)



no warranties on air bubbles
(be careful on vertical pasting)



keep away from direct sunlight
(to prevent fade in color or any shade variation)



Scan QR code to download PDF

scan the QR code to view full catalogue of laminate design

and download the QR code App from Google Play

