

Mfg. By:



SHINEMICA LAMINATE PVT. LTD

Rohishala Village, Nr. L & T Toll Plaza-04, Halvad Highway, Tal. Maliya-363 630, Morbi, Gujarat, India.

Cell: +91 95376 63325, 90335 72928 Office: +91 63517 97178,













SHINE MICA Brings you the world class premium quality decorative laminates to match your refined taste and distinct persona.



Copany Profile

SHINE MICA Laminates Pvt. Ltd. has completed 5 years of operations in India.we are manufacturing high pressure and industrial laminates.

The company has its manufacturing unit at Rohishala Village Tal. Maliya Dist Morbi Gujrat which is truly world class where all its products are manufactured to the most stringent international standards in tune to its eco-friendly policy of green products.

It also has its own R&D centre striving for continuous upgradation of technology as per ROHS certification end avour has been to bring out a combination of environment and design oriented operations.

The company has dealer network all over India. The company's commitment to offer excellence in customer's service and satisfaction remains steadfast.

The Best Or Nothing...





100% PHENOLIC











J0-311



01/02

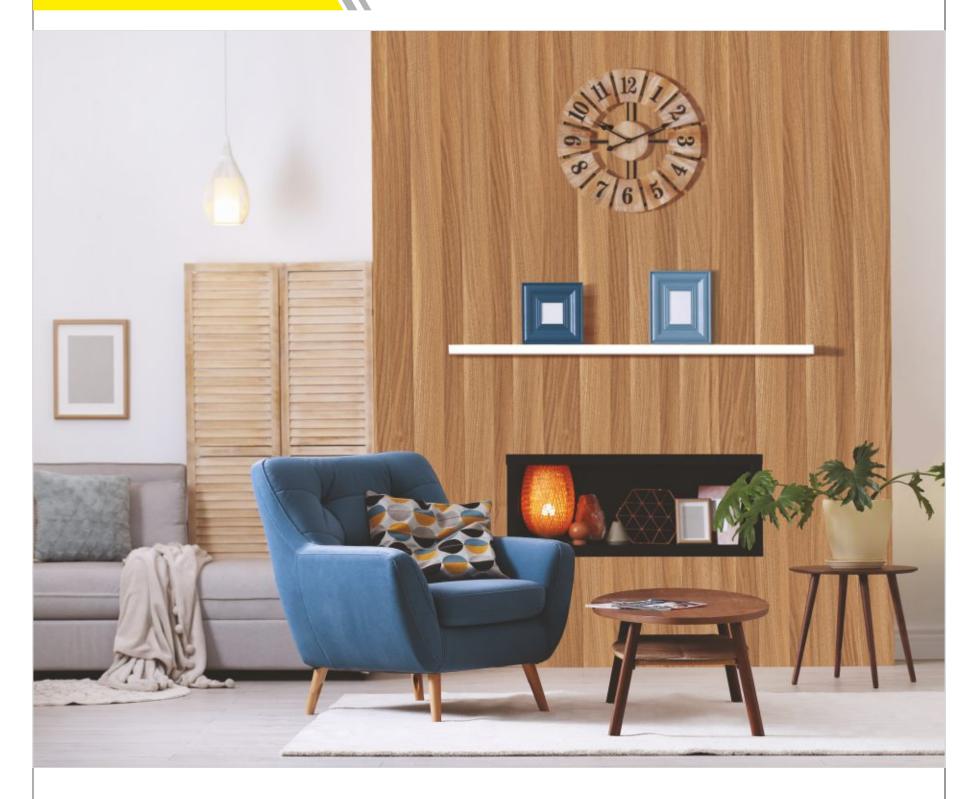



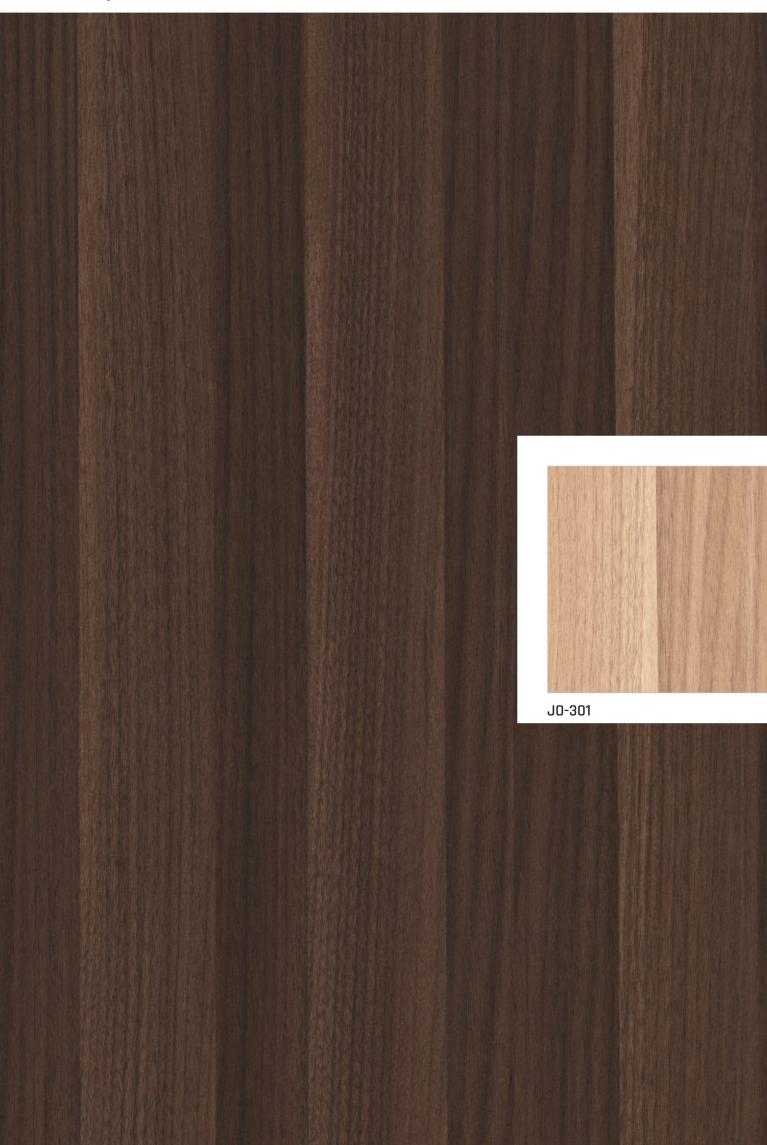

J0-314














VZ-325



VZ-326

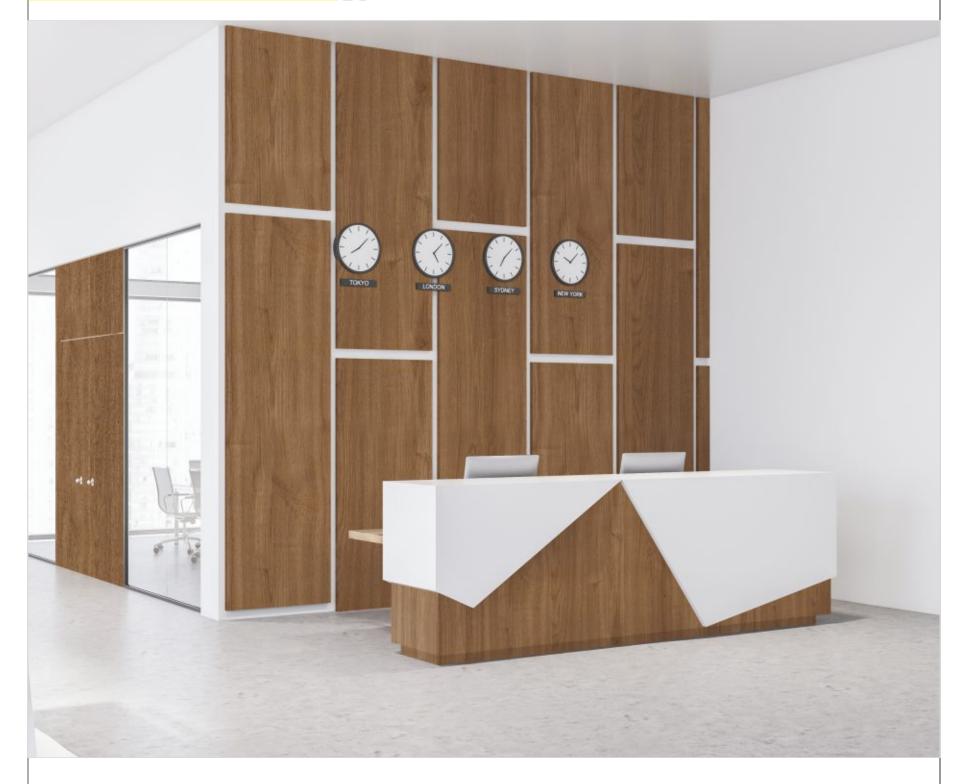



















VZ-309

LC-309

09/10

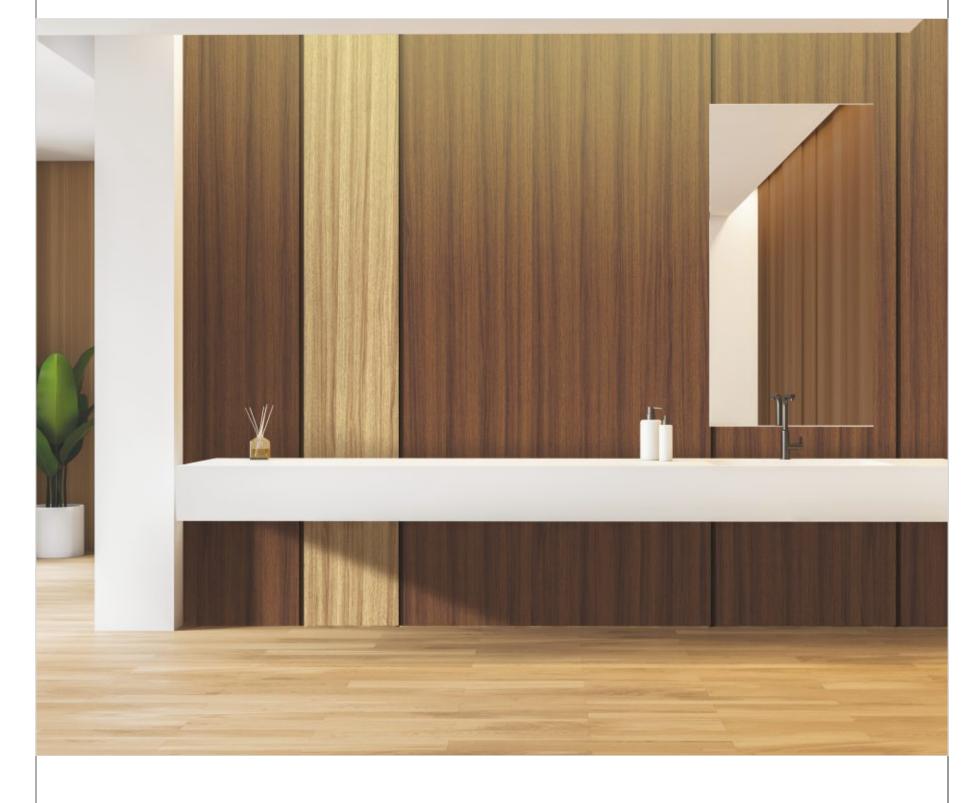




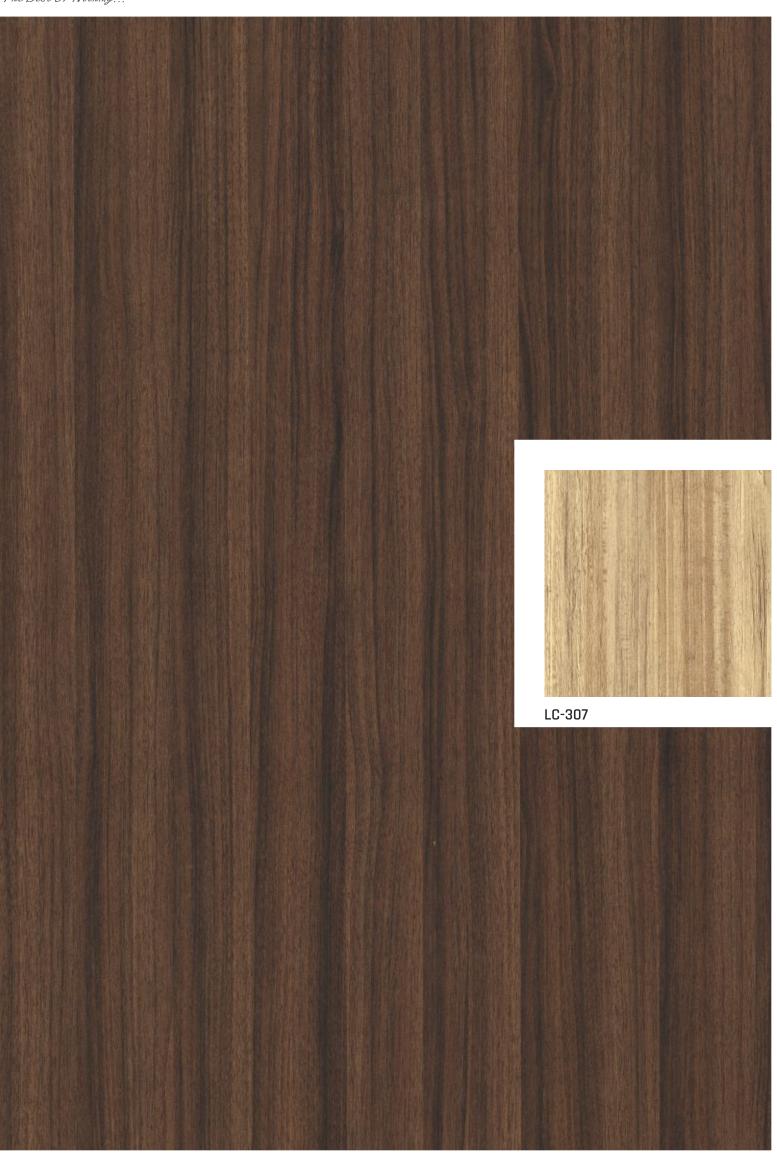

LC-302





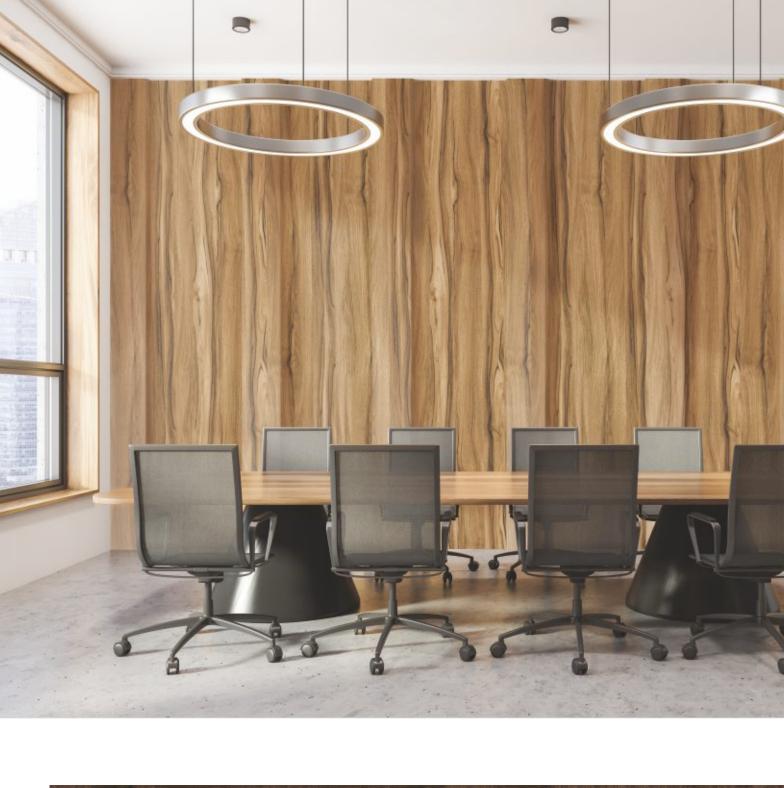



WD-319
















WD-315

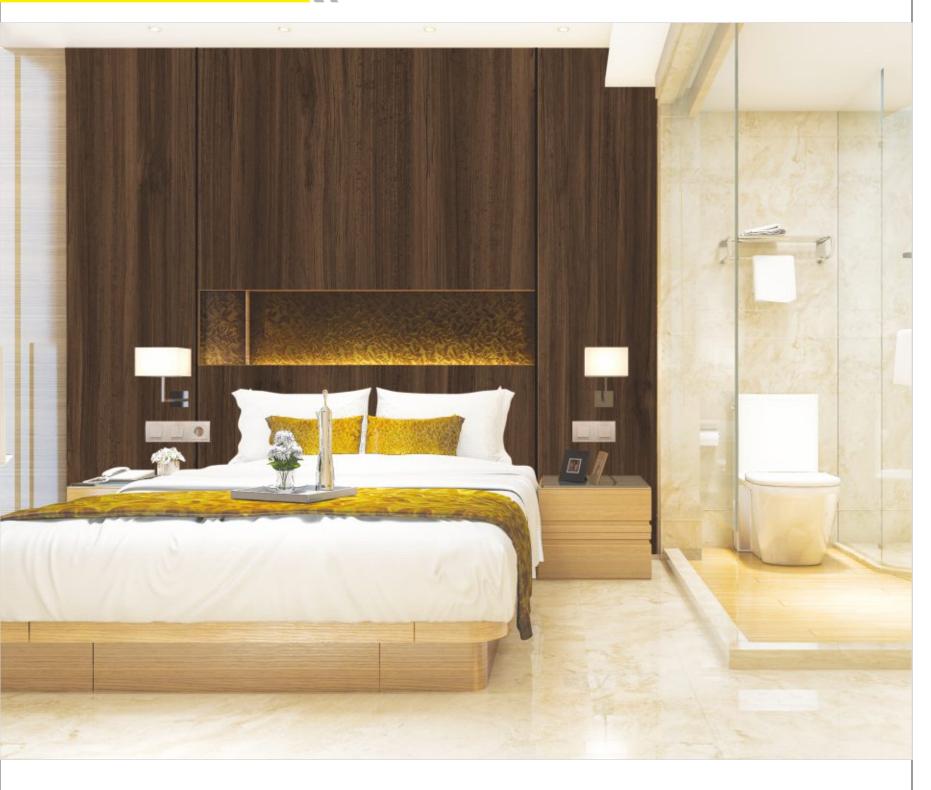










HG-323



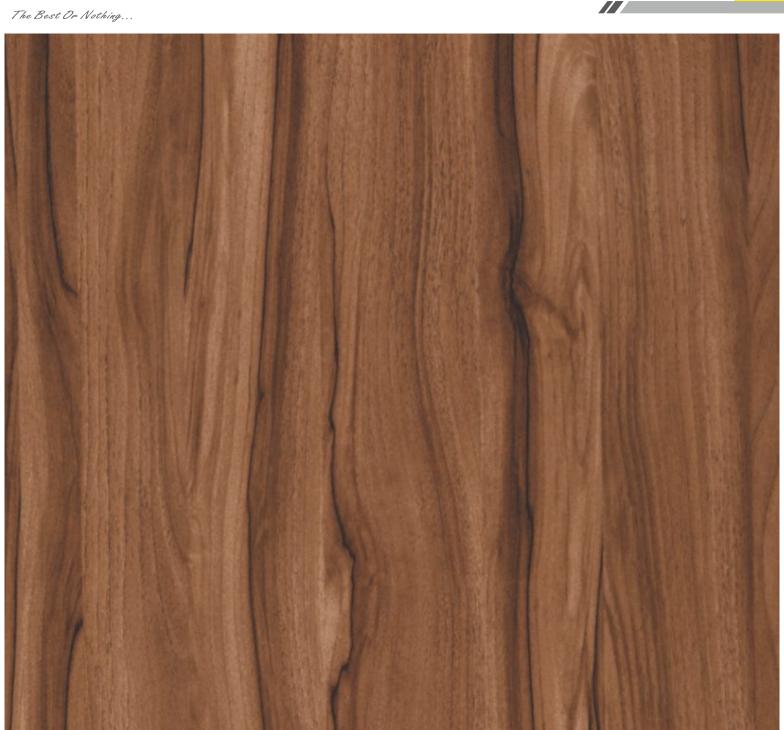

HG-315











SMT-324











SMT-325







SMT-215


HG-215


SF-215








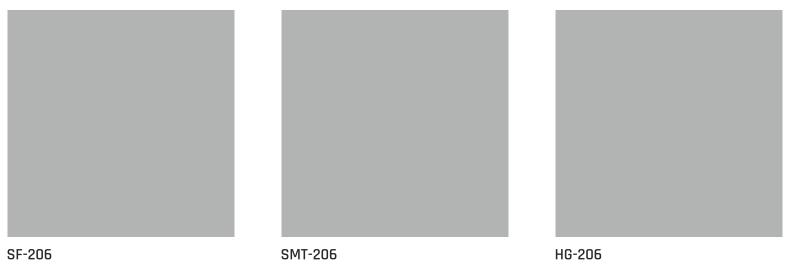

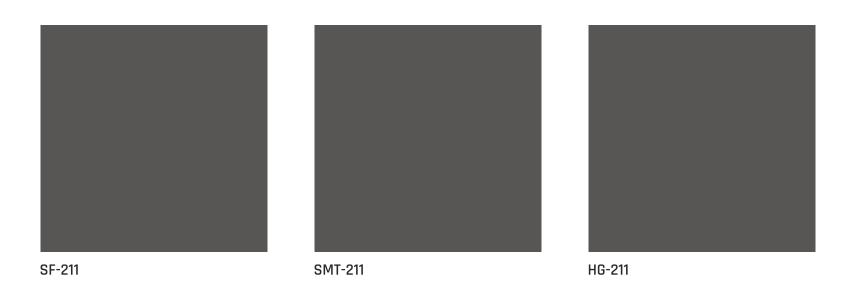

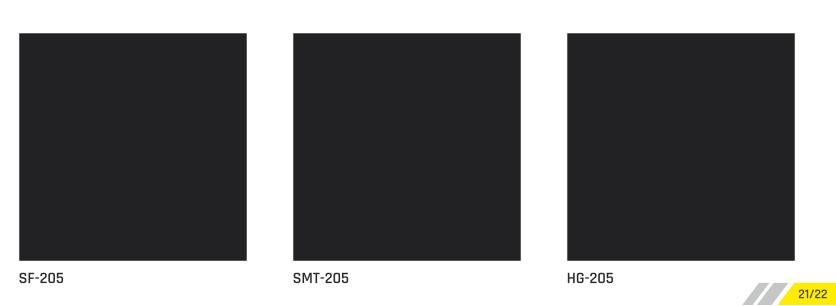

















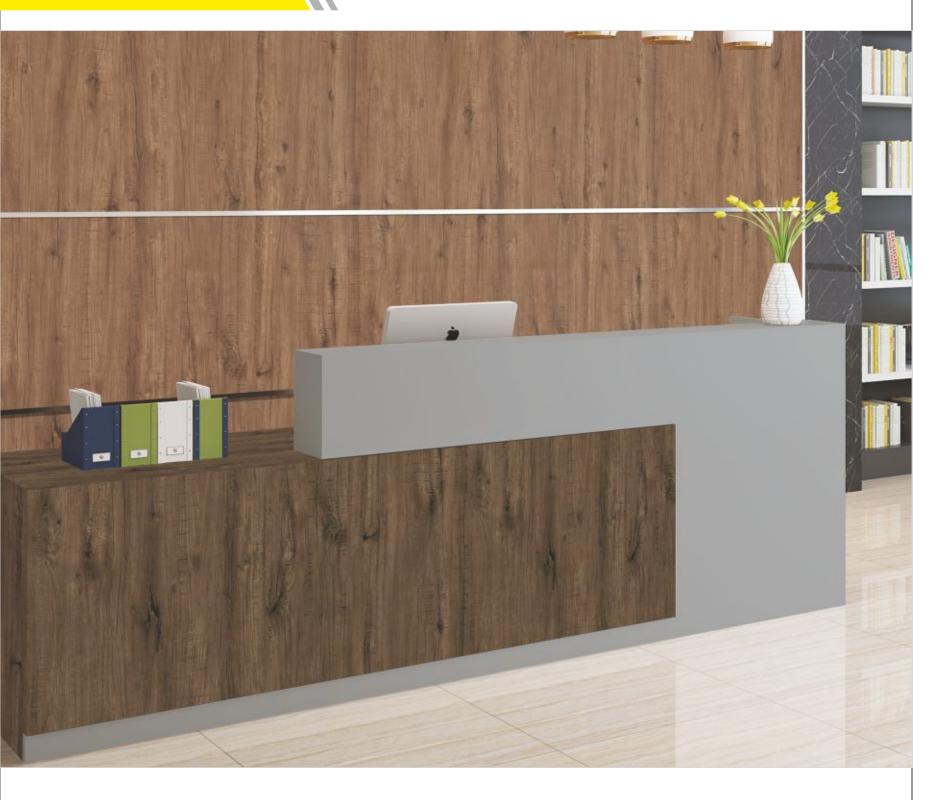



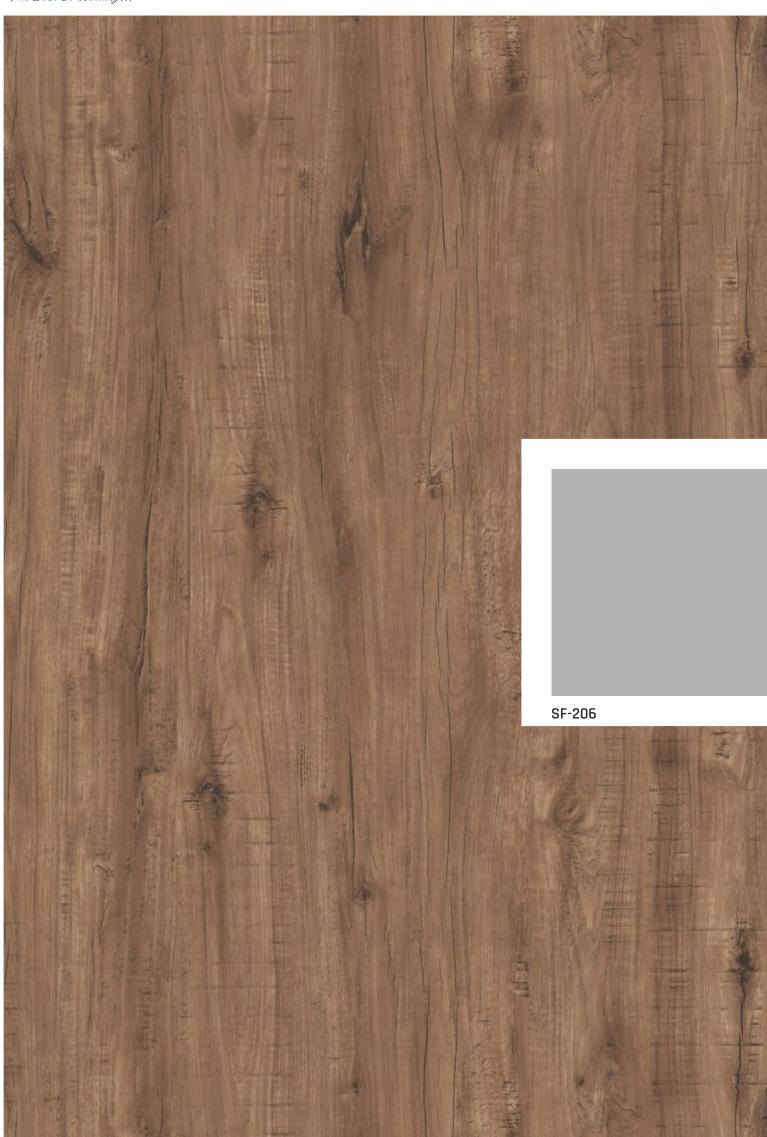

SF-324

SF-323












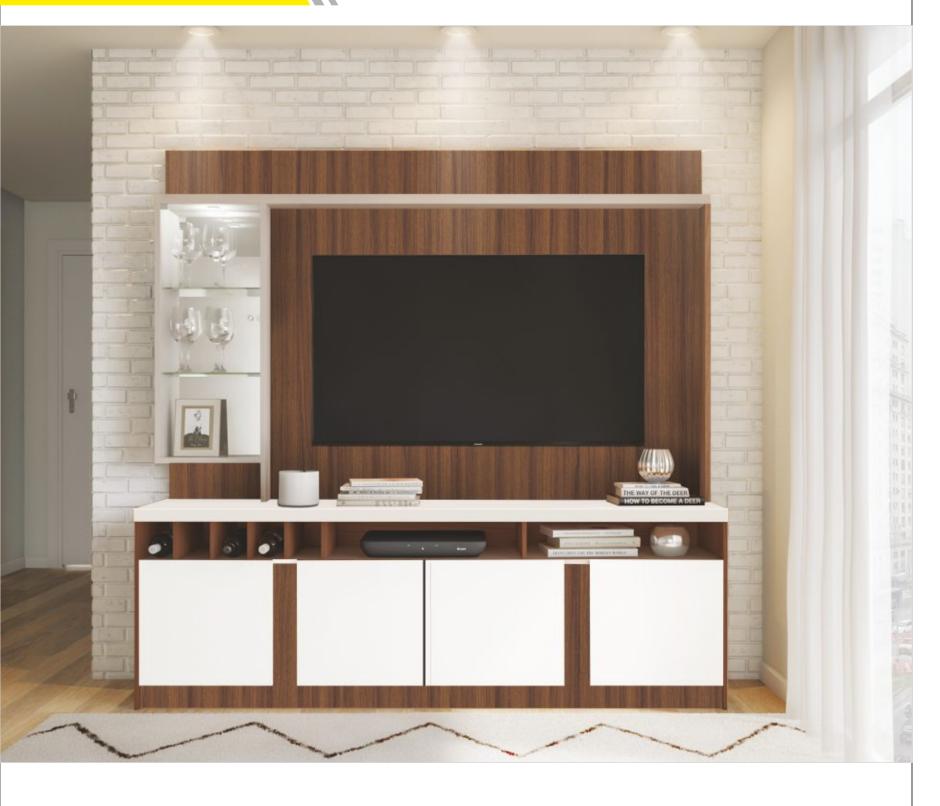















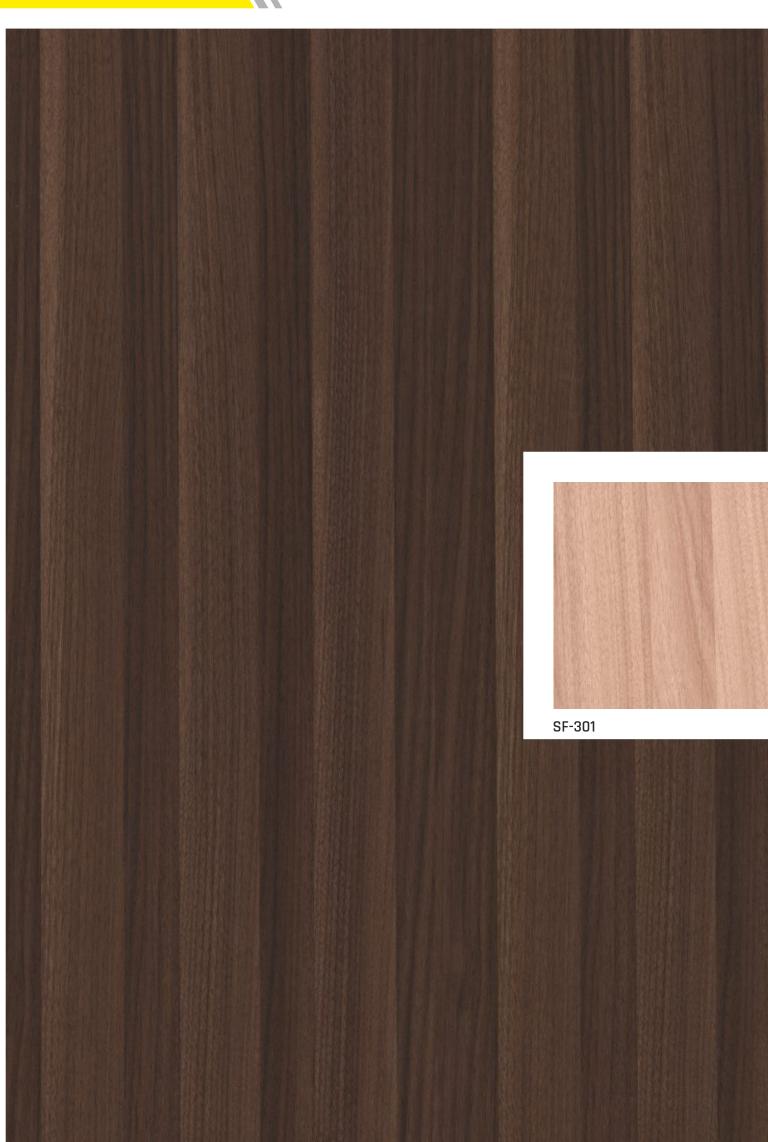






SF-319

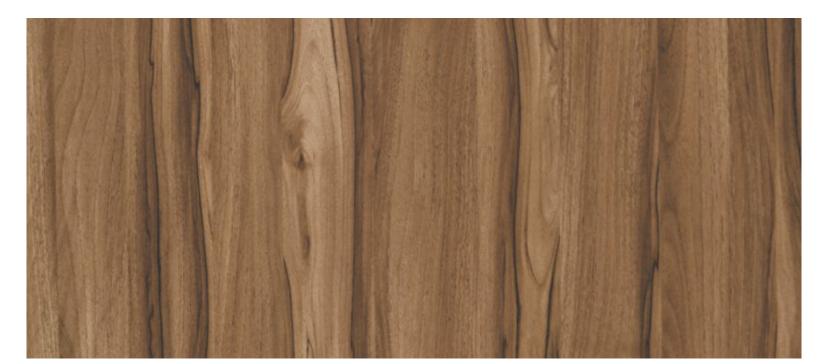






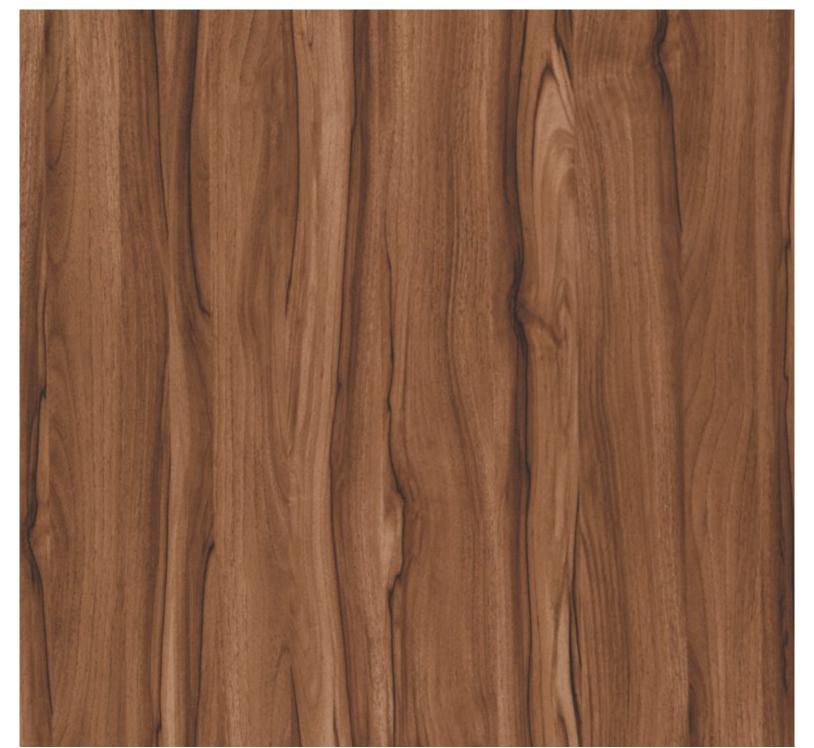

SF-315



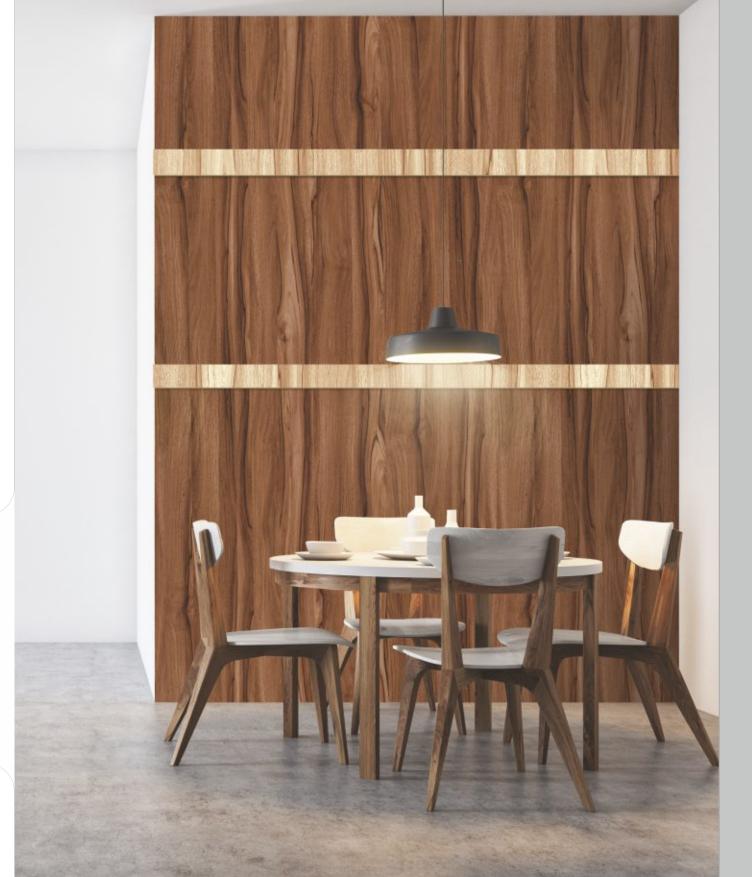















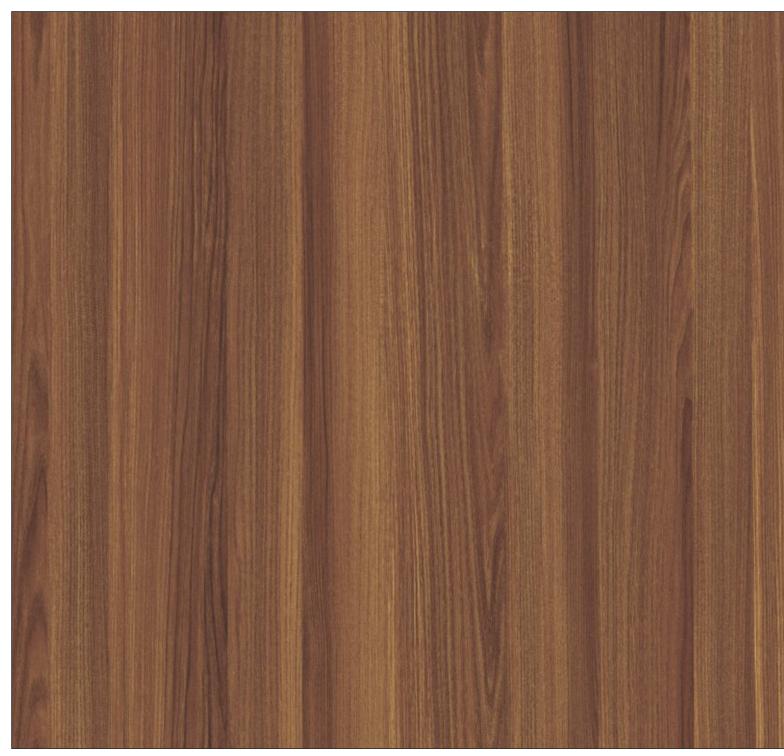







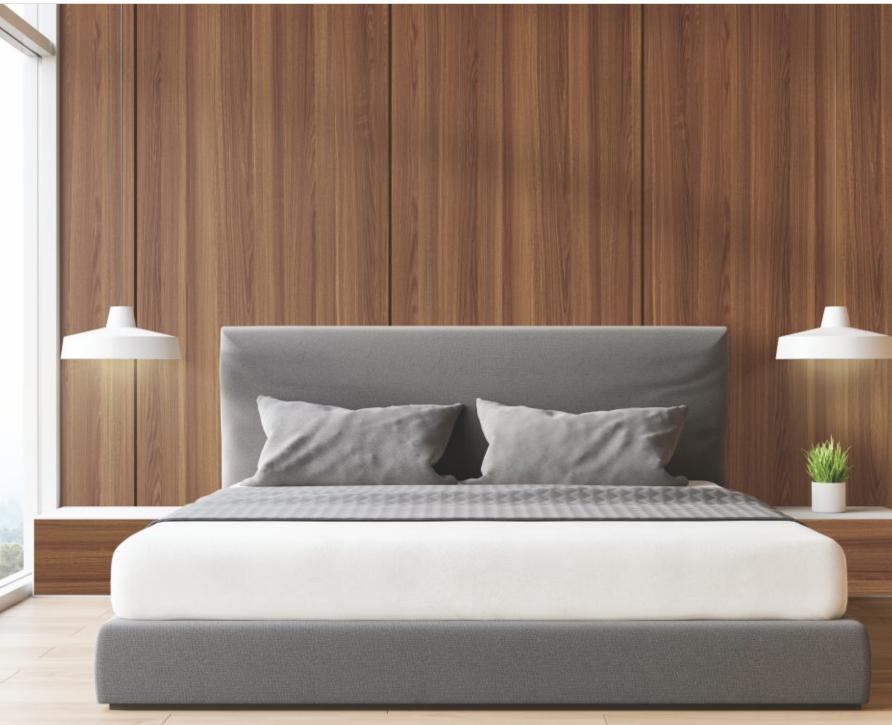






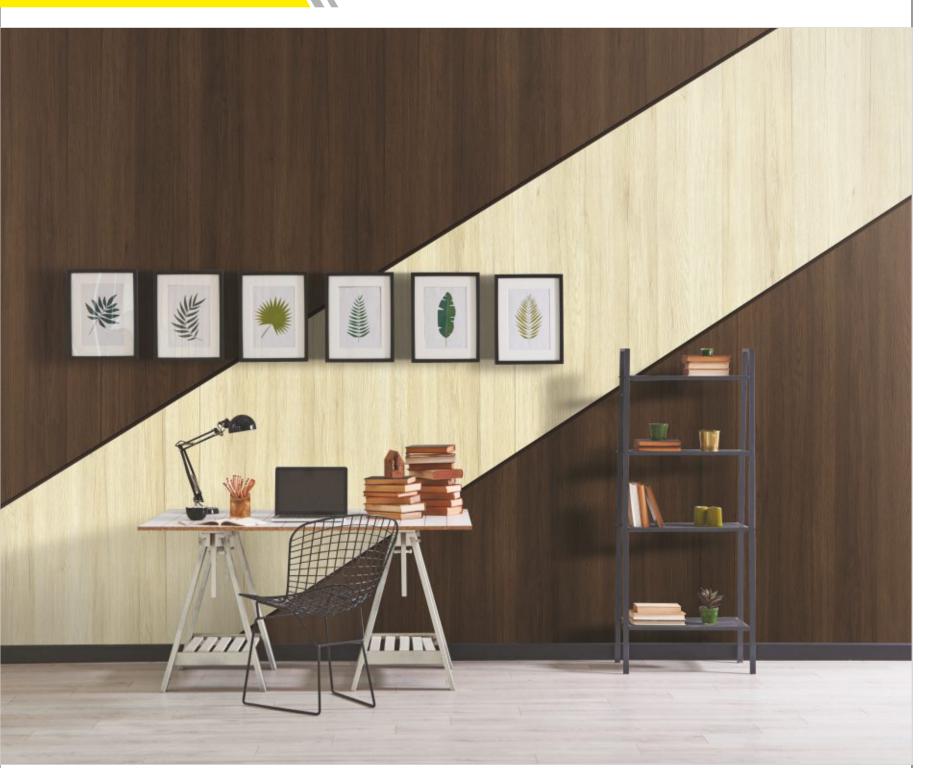

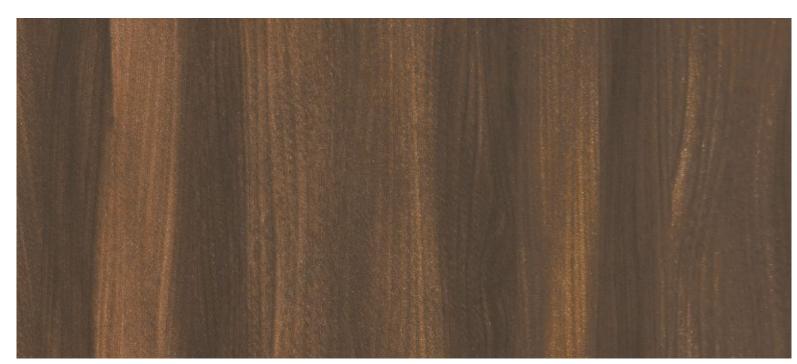





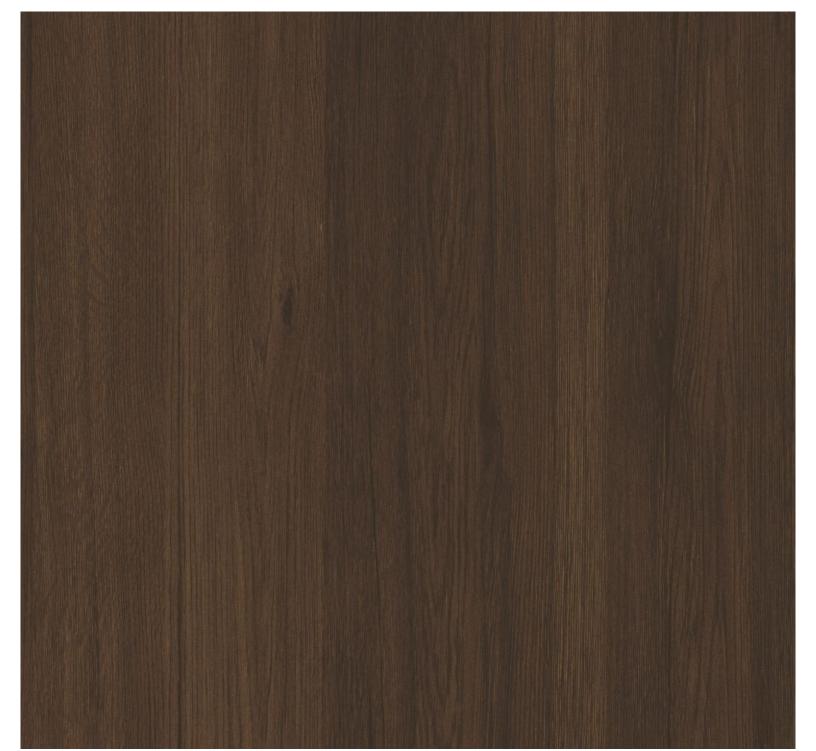

SF-101



SF-106










SF-310 SF-312

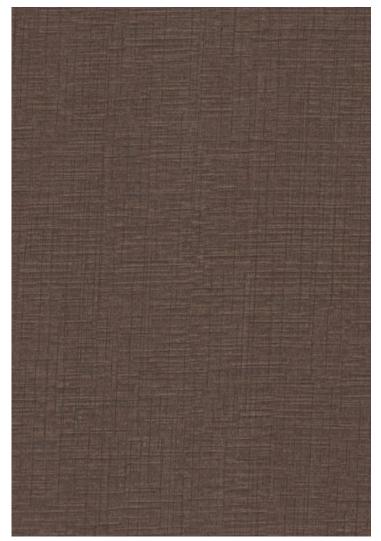





TECHNICAL SPECIFICATION



SR. NO.	Finish	Design	Pg.		
JUNGLE OAK					
01	J0	311	01		
02	J0	314	02		
03	J0	301	02		
VENZA					
04	VZ	323	03		
05	VZ	324	04		
06	VZ	325	05		
07	VZ	326	06		
08	VZ	304	07		
09	VZ	309	08		
LUMBER CUT					
10	LC	309	09		
11	LC	302	10		
12	LC	307	10		
WOODY					
13	WD	313	11		
14	WD	319	12		
15	WD	322	13		
16	WD	315	14		
SILK WOOD					
17	sw	320	15		
18	sw	304	16		
19	sw	306	16		
HIGH GLOSS					
20	HG	323	17		
21	HG	324	17		
22	HG	315	18		
23	HG	304	18		

	. Finish	Design	Pg.		
SUPER MATT					
24	SMT	324	19		
25	SMT	323	19		
26	SMT	325	20		
27	SMT	326	20		
PLAIN	COLOR				
28	SF	201	21		
29	SF	202	21		
30	SF	214	21		
31	SF	215	21		
32	SMT	201	21		
33	SMT	202	21		
34	SMT	214	21		
35	SMT	215	21		
36	HG	201	21		
37	HG	202	21		
38	HG	214	21		
39	HG	215	21		
40	SF	206	22		
41	SF	211	22		
42	SF	205	22		
43	SMT	206	22		
44	SMT	211	22		
45	SMT	205	22		
46	HG	206	22		
47	HG	211	22		
48	HG	205	22		

SR. NO.		Design	Pg.		
SUEDE FINISH					
49	SF	325	23		
50	SF	326	24		
51	SF	324	25		
52	SF	323	26		
53	SF	304	27		
54	SF	306	27		
55	SF	320	28		
56	SF	302	29		
57	SF	309	30		
58	SF	307	30		
59	SF	314	31		
60	SF	301	31		
61	SF	311	32		
62	SF	319	33		
63	SF	313	33		
64	SF	315	34		
65	SF	322	34		
66	SF	317	35		
67	SF	318	35		
68	SF	316	36		
69	SF	117	37		
70	SF	101	38		
71	SF	106	38		
72	SF	310	39		
73	SF	312	39		
74	SF	305	39		
75	SF	303	39		

Direction of Use: Before using laminate, please ensure that the surface of plywood and laminate are clean, dry and free other contaminations. Please well stir adhesive before use and don't add water in it. Also ensure that applied adhesive sufficient or not?

Once laminate pasted on plywood surface, don't forget to apply adequate pressure for perfect bonding remove air bubble from assembly use roller press from centre of assembly toward sedge of assembly

A gap of minimum 2 mm should be maintalned between two laminates while pasting side by side.

Note: For actul colour, Pattern & Finish refer live sample as due to Printing Limitation there might be slight variation.



NO CLAIM WILL BE ENTERTAINED FOR AIR BUBBLES



NO CLAIM WILL BE FNTFRTAINED FOR CRACKING ARISING OUR OF GROOVE CURRYING OR L.SHAPE













Properties	Specified Values as per IS:2046-1995, Type S, HGS	SILK LAM Conforme	APPLICATION AREA
Resistance to surface were	350 (Revolutions)	✓	
Resistance to immersion in boiling water - Mass increase (%) - Thickness increase (%) - Appearance	10.0 (Maximum) 11.8 (Maximum) Not worse than 4	✓	Industries Hotel
Resistance to dry heat 180 c	Not worse than 4	✓	+
Dimensional stability at deviated temperature - Longitudinal (%) - Transverse (%)	0.55 (Maximum) 1.025 (Maximum)	/	Hospital Corridors / Halls
Dimensional stability at 20 c - Longitudinal (%) - Transverse (%)	0.375 (Maximum) 0.60 (Maximum)	✓	Offices Domestic
Resistance to impact by small diameter bal	20 N (Minimum)	✓	Onices
Resistance to cracking	Not worse than 4	✓	
Resistance to scratching	2 N (Minimum)	✓	
Resistance to staining	Not worse than 5	✓	Airport Terminals Restaurants - Cafes
Resistance to colour change (wood standards) - In xenon arc light - In enclosed carbon arc light	Not worse than 6 Not worse than 5	✓	Discotheque Schools
Resistance to cigarette burns	Not worse than 3	✓	
Resistance to steam	Not worse than 4	✓	
Appeatance	Should be free from foreign particles	✓	Shopping Center Religious Places

All Testes may not valid for embossed & metallic laminate.

Grades : General and fire retardant {FR}

Types Size : Standard, post forming, compact, cabinet liners, backer : 2440 mm x 1220 mm {8'x4'}

SILK LAM Highlight:

- Design from genuine imported base paper.
- Manufactured using best quality craft paper.
 Use of best chemical raw materials for batter flexibility & durability.

Care & Maintenance : Cleaning should be carried out with a soft moist cloth and warm soap solution. Do not use detergents containing abrasive particle or excess soda.

Disclaimer: Customers are advised to reconfirm selected laminate when placing orders as our liability does not include claims arising from sample chip pasting error. Samples presented are indicative of colour, pattern and surface finish but not of actual thicknesses. All metallic patterns series recommended for vertical application only.

Limited Warrenty: SILK LAM warrants that its products are reasonable free from monufacturing defects. The products when properly used, will comply, with normal deviation, to related manufacturing specifications. This warranty shall be limited only to the original buyer for a period of cere. Improper use and / or any alteration. It is recommended that the products must be inspected prior to installation and our liability will be limited to the extent of the cost of the products only SILK LAM are used for various applications. Without the possibility of control over the manufacturing of the finished products. The Company does not assume obligations or liabilities arising from the furnishing, sale, installation or repair, use or subsequent sale of any product, to any person or entity

LIMITED WARRANTY

- KINDLY CHECK THE SHEET IN ALL ASPECTS IMMEDIATELY AFTER PURCHASING & PRIOR TO CUTTING.
- IN CASE OF MANUFACTURING DEFECT, ONLY REPLACEMENT OF USED SHEET WILL BE MADE.
- NO WARRANTY FOR CORNER CRACK OR AIR BUBBLE.
- NO CLAIM WILL BE ENTERTAINED THERE AFTER IN ANY OF THE SPECIFICS.
- Do not use nail and hammer while cutting such Corner, Grew, Angle, Designs.
- Use Only Drill While Cutting Such Corner, Grew, Angle, Designs.

